



KLINGSPOR

The Most Sanding Power for Your Money Since 1893!



AUTOBODY PRODUCTS

877-456-5566 • KlingsporAutobody.com



KLINGSPOR

KLINGSPOR Abrasives has been manufacturing abrasives for the automotive after-market industries for many years. Our commitment to make only top-quality products for this industry is very important to you the customer. You'll get the very best products for some of the very best prices in the business. You can take that straight to the bank. Make your sanding and finishing process more efficient - try KLINGSPOR today!



TERMS AND CONDITIONS

TERMS: Minimum \$50.00 order. Net 30 days from date of invoice. Invoices not paid within terms will be considered delinquent, and any orders will be placed on hold until delinquent invoices are paid.

DELIVERY: Single order shipments to one destination totaling \$300.00 or more will be shipped F.O.B. destination via carrier of our choice, continental U.S. only. Orders under \$300.00 will be shipped F.O.B. KLINGSPOR Distribution Point, continental U.S. only.

ALASKA & HAWAII SHIPMENTS: Shipments to Alaska or Hawaii will be prepaid only to the point of embarkation within the continental U.S., provided above conditions are met. NOTE: KLINGSPOR ABRASIVES cannot be held accountable for delays once an order is released to a carrier.

QUANTITY VARIANCE: Because of the nature of the manufacturing process, a $\pm 10\%$ variance will be allowed by the buyer to the manufacturer.

PRICING: All prices in this catalog are subject to correction and change without notice. All computer invoice extensions have been calculated utilizing two decimal places; therefore, there is the possibility that variations, however minor, may occur due to rounding, and shall be allowed by the buyer.

RETURN POLICY: Returns of merchandise will be accepted only with prior return authorization. Custom size items cannot be returned. All products authorized for return must be properly packaged and returned freight prepaid and in original packaging in re-sellable condition. We are not responsible for items ordered in error or overstocked; if any exceptions are made, a 15% restocking fee will apply. Material non-refundable after one year.

PRODUCT WARRANTY: KLINGSPOR ABRASIVES, Inc. warrants all products to be free from defects for up to one year. If any KLINGSPOR products are found to be defective, buyer's sole and exclusive remedy will be the replacement of any such products or, at KLINGSPOR's option, the refund of buyer's purchase price for said products. In any event, KLINGSPOR shall not be liable for any consequential damages.



Certified to
ISO 9001:2015





ABRASIVES AT A GLANCE

PSA DISCS AND DISC ROLLS

Several materials are available in our disc roll form. Each has its purpose in the body shop. Our heavy aluminum oxide stearate materials (FP 73W, VP 73W and PS 73W) are possibly the best stearate products on the market today. They consist of premium aluminum oxide grains fully resin-bonded to a heavy paper backing - perfect for excessive body filler work or paints and primers! The PS73W has an added plus - an "Extra Lube" that makes sanding in your finer grits easier, faster, and more efficient with even less loading.

HOOK AND LOOP

Kling-On® is KLINGSPOR's hook & loop line of sanding discs. Our popular paper materials are available in this form - with or without holes. Discover the benefits of using Kling-On® hook & loop discs. Several materials are available in our Kling-On® discs. Each has its purpose in the body shop. Our heavy aluminum oxide stearate material (PS33) is possibly the best stearate product on the market today. It consists of premium aluminum oxide grains fully resin-bonded to a heavy paper backing - perfect for excessive body filler work or paints and primers!



PSA AND KLING-ON® ROLLS

These PSA rolls will make cutting your own board file sheets a breeze. These are precut to the exact width needed and can easily be cut to length. Our popular premium file board materials are included.

SHEETS

Whether you're sanding body filler, metal, paints & primers, or clearcoats, you'll find the perfect sheet from KLINGSPOR. A huge variety of different materials make fine-tuning your specific application an easy task.



BOARD FILE SHEETS

Make short work of body fillers or metal with these popular-sized board file sheets. KLINGSPOR board file sheets have received raves everywhere they have been tried. Our premium aluminum oxide stearate material is effective for most applications while our heavy-weight zirconia papers will handle those tough, coarse grit situations. When body file sanding is important, you'll want to count on KLINGSPOR's premium materials. Most are available in Non-PSA, PSA and Kling-On®



TABLE OF CONTENTS

PSA Discs	4-5
Kling-On® (Hook & Loop) Discs	4-5
File Board Sheets & Continuous Rolls	4-5
Sheet Paper & Handpads	4-5
Flexible Sanding Pads	6
Non-Woven Products	6
Belts	7
Unitized Discs	7
Grit Chart	8-9
QDC/QRC/QMC Discs	10
Fibre Disc / Grinding	11
Flap Disc (SMT & CMT)	12-13
Titan Grinding Wheels	14
Spartan Sander	15
Cut-Off Wheels	16
Wire Wheels	17
DevilBiss	18
Tapes, Masking & Removal	19-20
Body Fillers & Automotive Cabinet	21-22
Adhesives & Seam Sealers	23-24
Primers	25-26
Clear Coats	27-28
Prep: Additives	29
Spray Can Aerosols	30
Autobody Accessories	31-32
Shop Pads & Accessories	33
Sanding Blocks	34
Buff & Polish	35-36
Safety Protection	37-40
Spray Guns & Accessories	41-42
Power Tools	43
Backing Pads	44
Dynabrade Air Power Tools & Accessories	45-46
Astro Power Tools	47-48



Abrasive Materials

KlingNet Discs



KlingNet offers all the advantages of a conventional coated abrasive, but offers extraction and creates a safer work environment, with extended disc life.

Properties:

Bonding Agent	Resin Bond
Grain	Aluminum Oxide

Properties:

Coating	Open Coat Kling-On
Backing	Strong Mesh Material

Applications:

Paint/Varnish/Filler	●
Plastic	●

Available Grits: **80, 100 - 800**

Abrasive Style: Hook & Loop Discs (5" or 6")



Hook & Loop Roll (25m)

PS 36

ALUMINA ZIRCONIA paper



Sanding primer, clear coat, or plastic components. These C and D weight papers from KLINGSPOR combine the effectiveness of Alumina Zirconia grains and a stearate coating with the leveling properties of paper. A more consistent finish can be achieved when sanding wood, metal, and various other substances including body fillers. PS 36 is a premium fully resin bonded product.

Properties:

Bonding Agent	Resin
Grain	Alumina Zirconia

Properties:

Coating	Semi-open
Backing	C/D paper

Applications:

Paint/Varnish/Filler	●
Plastic	●

Available Grits: **36, 40, 60, 80, 100, 120, 150, 180, 220**

Abrasive Styles: Discs
PSA tab or Kling-On®
(3", 5", 6" or 8")



PSA Disc Roll
(3", 5", 6" or 8")



PSA Roll
(25m)



Sheets
(9" x 11")



Board Sheets

VP 73W

Aluminum Oxide

TOP COATED Stearate LATEX



Enhanced PS73W material with a latex impregnated backing for longer edgewear and life. May be used anywhere PS33 is found including bare wood, composite, marine and autobody. This material is not waterproof.

Properties:

Bonding Agent	Resin
Grain	Aluminum Oxide

Properties:

Coating	Semi-Open
Backing	Latex

Applications:

Paint/Varnish/Filler	●
Plastic	●

Available Grits: **80 100 120 150 180 220 240 320 400 600 800 1000 1200 1500**

Abrasive Styles: Hook & Loop Discs (3", 5", 6")



PSA Roll (25m or 50m)



PSA Disc Roll (5" or 6")

FP 73W /FP77

Aluminum Oxide

TOP COATED Stearate FILM



Perfect for excessive body filler sanding including paint, varnish, fillers and plastic. Heat Treated Aluminum Oxide on a 3 mil poly film backing, FP73W is the latest generation in the PS73W material product line. It's semi-open coat grain covering and double layer of stearate make it the ideal product for longer life in woodworking, solid surface, auto body and composite markets. The 3 mil poly film backing makes it tear resistant and enhances the finishing characteristics of this product.

Properties:

Bonding Agent	Resin
Grain	Aluminum Oxide

Properties:

Coating	Semi-Open
Backing	Film

Applications:

Paint/Varnish/Filler	●
Plastic	●

Available Grits: **80 100 120 150 180 220 240 320 400 600 800 1000 1200 1500**

Abrasive Style: Hook & Loop Discs (3", 5", 6")

PS 73W /PS 77

Aluminum Oxide Stearate



Specifically for automotive body work and for applications in the boating industry. Aluminum Oxide resin-bond, B weight paper backing coated with a select mixture of stearates for even less loading than ever before! Also useful on sanding of solid surface materials.

Properties:

Bonding Agent	Resin
Grain	Aluminum Oxide

Properties:

Coating	Semi-Open
Backing	B/C Paper

Applications:

Paint/Varnish/Filler	●
Plastic	●

Available Grits: **80 100 120 150 180 220 240 320 400 600 800 1000 1200 1500**

Abrasive Styles: Discs
PSA tab or Kling-On®
(3", 5" 6" or 8")



PSA Disc Roll
(3", 5", 6" or 8")



PSA Roll
(25m)



Sheets
(9" x 11")



Board Sheets

Abrasive Materials

PS 21

ALUMINA ZIRCONIA extra heavyweight Paper



Extra long life and fast cutting for blending and shaping of body fillers, bare metal, welds and stripping paint. F-weight paper, fully resin-bonded, alumina zirconia grains. Ideal on steel and stainless steel plates. Also for use on stamped parts, final grinding of cast-iron housings.

Properties:

Bonding Agent	Resin
Grain	Alumina Zirconia

Properties:

Coating	Closed
Backing	F paper

Applications:

Paint/Varnish/Filler	●
Plastic	●

Available Grits: **40, 60, 80, 100, 120**

Abrasive Styles: Discs PSA tab or Kling-On® (3", 5", 6" or 8")



PS 33

Aluminum Oxide Paper



B or C-weight paper, resin-resin bond for bare wood sanding, autobody use, sanding of bare metal, primer, primer surfacer, between coats of paint and sanding of body filler.

Properties:

Bonding Agent	Resin
Grain	Aluminum Oxide

Properties:

Coating	Semi-Open
Backing	B/C Paper

Applications:

Paint/Varnish/Filler	●
Plastic	●

Available Grits: **80 100 120 150 180 220 240 320 400 600 800 1000 1200 1500**

Abrasive Styles: Discs PSA tab or Kling-On® (3", 5" 6" or 8")



FUSION FOAM

Aluminum Oxide or Silicone Carbide



Abrasive slurry poured onto a foam pad with no substrate between provides exceptional conformability and consistency of finish. Can be used wet or dry for finishing applications in automotive and marine body, aerospace, wind energy and many other applications where the finest of finishes is required and performance and longevity is desired. Does particularly well on the fine sanding of the darker solid surface materials like Formica. Wet running enhances.

Properties:

Bonding Agent	Resin
Grain	Aluminum Oxide or Silicone Carbide

Properties:

Coating	N/A
Backing	Foam

Applications:

Paint	●
Plastic	●

Available Grits: **800 - 1000, 1200 - 1500, 1500 - 2500, 2800 - 3500**

Abrasive Styles: Discs PSA tab or Kling-On® (3", 5" or 6")

- * Discs are available in ALUMINUM OXIDE in 800-1200 and 1200-1500 grit.
- * Discs are available in SILICON CARBIDE in 800-1200, 1800-2500 and 2800-3500 grit. Please specify when ordering.

PS 11

Silicon carbide waterproof



Sanding primer, clear coat, or plastic components. Waterproof Silicon Carbide, A and C-weight latex papers, resin-resin bonded and available in grits P60 - P2000. Use for sanding of furniture finishes such as varnish, lacquer, shellac, oil, polishing of glass, and in automotive body shops for final color sanding of paint.

Properties:

Bonding Agent	Resin
Grain	Silicon Carbide

Properties:

Coating	Closed
Backing	A/C paper

Applications:

Paint	●
Plastic	●

Available Grits: **60, 80, 100, 120, 150, 180, 220, 240, 320, 400 600, 800, 1000, 1200, 1500, 2000**

Abrasive Styles: Discs PSA tab or Kling-On® (3", 5" or 6")



3" x 3 holes



5" x 5 holes



6" x 6 holes



8" x 8 holes

AVAILABLE PSA AND HOOK & LOOP HOLE PATTERNS

Flexible Sanding Pads

These foam and sponge sanding pads are perfect for quick hand sanding of contoured or profiled parts.

ULTRAFLEX SANDING PADS

The UltraFlex Sanding Pads are the premium foam pads on the market. These incorporate a dense foam structure and a full, even coating of either ALUMINUM OXIDE or SILICON CARBIDE grains. This makes for an extremely long-lasting pad that is very flexible for finish-sanding of contoured parts and profiles. The pad measures 4 1/2" wide and 5 1/2" long. 10 per pack.

Pads are available in ALUMINUM OXIDE in 100, 120, 180, 220 and 320 grit.

Pads are available in SILICON CARBIDE in 120, 180, 220 and 320 grit. Please specify when ordering.

FOAM SANDING PADS

The Foam Sanding Pad can be used on severely profiled parts, because it is more flexible and much thinner. The foam pad measures 5" long, 4" wide and 1/2" thick. KLINGSPOR Foam Sanding Sponges are now produced with the latest technological advances. These general purpose foam pads are solvent free and outperform other similar pads on the market. 10 per pack.

Pads are available in 60, 80, 100, 120, 180 and 220 grit. Please specify when ordering.



Non-Woven Handpads

Our non-woven nylon pads offer excellent conformability and a variety of uses including scuffing of primer and area to blend. 6" x 9" size pads.

6" x 4 1/2" Hand Pad Holder Item# NWHOLDER



NON-WOVEN DISCS

Klingspor Non-Woven Discs will offer you a different sanding function over regular coated abrasives. You'll be able to accomplish your scuffing applications much faster with the Lightweight Clean & Polish discs. And with the Heavy-Duty Scrim Back Discs attached to any DA sander with a hook & loop backing pad, you can remove rust, oxidation and coatings.

Clean & Polish - Lightweight 10 PER PACK

Size	Very Fine / Medium
5" x NH	✓
6" x NH	✓
8" x NH	✓

NON-WOVEN ROLLS

Clean & Polish - Lightweight PACKAGED 1 ROLL PER PACK

Size	Very Fine-S/C	Medium-A/O	Coarse-A/O
4" x 30 Feet	✓	✓	✓
6" x 30 Feet	✓	✓	✓

S/C = Silicon Carbide • A/O = Aluminum Oxide

Please Note: This is not the same product as the handpads.

Slim/Flexible Hand Pads

NWAVFIN-6X9KLINGSLIM
NWAUFIN-6X9KLINGSLIM

Medium = Maroon • Very Fine = Gray Package: 10 per pack



NON-WOVEN MATERIAL REFERENCE

Name	Color	Application
General Purpose	Green	Medium grade for rust removal, scuffing and general clean-up
Fine	Maroon	Fine grade aluminum oxide for removal of rust, general clean-up, heavy oxidation and sanding of old paint
Ultra Fine	Gray	Ultra fine silicon carbide for blending of clearcoats and lightly sanding primers
No Abrasive	White	Non-abrasive for paint overspray removal and light clearcoat primer rub down
Coarse	Brown	Coarse aluminum oxide for heavy rust and scale removal on metal

Abrasive Belts

To meet the needs of the most demanding applications, KLINGSPOR offers one of the most diverse groups of materials for abrasive belts. Sanding and/or grinding with belts is one of the most effective and efficient methods for achieving all types of surface finishes. Common applications are found in all forms of manufacturing whether in metal, wood, glass, plastics, rubber or any number of different substrates. KLINGSPOR belts have long been revered in the industry for their longevity, cutting power, and price. Choose KLINGSPOR abrasive belts for *The Most Sanding Power for Your Money Since 1893!*



Approved Dynaflex Materials: CS310XF, CS308Y, CS411Y, CS409Y, CS416Y, CS920, CS922, Non-Woven

File Belts

Grind away small welds or deburr in hard-to-reach areas.

Most common sizes of file belts
3/8"x12", 1/2"x12", 3/8"x13", 1/2"x13", 1/2"x18", 3/8"x18", 1/2"x24"



ALUMINUM OXIDE

These aluminum oxide belts will handle most small weld removal and deburring applications. The durable aluminum oxide grains combined with our special backing make the perfect belt for these small yet abrasive tools.

Premium - CS 409 Y - ALUMINA ZIRCONIA DRY LUBRICANT

A lubricated alumina zirconia material, CS 409 is ideal for tougher metals and for heavier weld beads and burrs. The dry lubricant aids in the reduction of generated heat.

Premium Portable Belts

Perfect for heavy stock removal. Use for smoothing metal surfaces.

CS 411 Y ALUMINA ZIRCONIA POLYESTER CLOTH

Belt Size	Box Qty	120 Grit	80 Grit	60 Grit	40 Grit	36 Grit	24 Grit

Most common portable belts
1"x 77", 3"x 21", 4"x 36", 6"x 48"



Unitized Discs

These unique depressed center discs offer a new solution for the metal working markets. They are manufactured using a highly durable unitized material attached to a fibre-reinforced backing plate. Applications include: deburring, edge breaking, blending, cleaning, polishing, and final finishing.

Available sizes: 2" x 1/4" x 1/4", 3" x 1/4" x 1/4", 3" x 1/2" x 1/2", 4" x 1/4" x 1/2", 2" x 1/4" x 1/2", 3" x 1/4" x 1/2"

List of Densities

Low Density	Med/Low Density	Med/High Density	High Density
2AM Medium Grit AO	3SF Fine Grit SiC	6AF Fine Grit AO	8AM Medium Grit AO
2SF Fine Grit SiC	4AF Fine Grit AO	6SF Fine Grit SiC	8AC Coarse Grit AO
	4SF Fine Grit SiC		9AC Coarse Grit AO



Info for Chart for Coated Abrasives

Description	Material	Backing	Available Grits	Properties	PSA / Kling-On
ALUMINUM OXIDE	PS 33 B	Paper	150, 180, 220, 240, 280, 320, 400, 500, 600	Stearate	PSA & Kling-On
	PS 33 C	Paper	40, 60, 80, 100, 120	Stearate	PSA & Kling-On
	PS 73 BW	Paper	150, 180, 220, 240, 320, 400, 500, 600, 800, 1000, 1200, 1500	Stearate	PSA & Kling-On
	PS 73 CW	Paper	40, 60, 80, 100, 120	Stearate	PSA & Kling-On
	VP 73 CW	Latex	80, 100, 120, 150, 180, 220, 240, 320, 400, 600, 800, 1000, 1200	Stearate	PSA & Kling-On
	FP 73 W	Film - 3 mil	80, 100, 120, 150, 180, 220, 240, 320, 400, 600, 800, 1000, 1200, 1500	Stearate	PSA & Kling-On
	PS 77 C ACT	Paper	60, 80, 100, 120, 150, 180, 220		PSA & Kling-On
	FP 77 ACT	Film - 3 mil	320, 360, 400, 500, 600, 800, 1000, 1200, 1500, 2000		PSA & Kling-On
	CS 308 YX	Poly/Cotton	40, 60, 80, 100, 120, 150, 180, 240		
	CS 310 XF	Cloth	40, 50, 60, 80, 100, 120, 150, 180, 220, 240		
	KL 361 JF	Cloth	30, 40, 50, 60, 80, 100, 120, 150, 180, 220, 240, 280, 320, 400, 500, 600	Shop Roll	
	CS 561	Vulcanized fibre	16, 24, 36, 40, 50, 60, 80, 100, 120, 150, 180, 220, 240, 320		
	KLINGNET	Net / Mesh	80, 100, 120, 150, 180, 220, 240, 280, 320, 400, 600, 800	Dust Extraction	Kling-On
	SILICON CARBIDE	PS 11 A	Paper	220, 280, 240, 320, 400, 500, 600, 800, 1000, 1200, 1500, 2000	Wet/Dry
PS 11 C		Paper	60, 80, 100, 120, 150, 180	Wet/Dry	PSA & Kling-On
PS 35 BW		Paper	80, 120, 150, 180, 220, 280, 320, 400	Stearate	PSA & Kling-On
ALUMINA ZIRCONIA	PS 21 F	Paper	40, 60, 80, 100, 120, 150, 180, 220, 240, 280, 320, 400		PSA
	PS 36 CW	Paper	60, 80, 100, 120, 150, 180, 220	Stearate	PSA & Kling-On
	PS 36 DW	Paper	36, 40	Stearate	PSA & Kling-On
	CS 409 YY	Polyester	36, 40, 50	Multibond lubricant	PSA in grits 36,50,80,120
	CS 409 YX	Polyester	60, 80, 100, 120	Multibond lubricant	
	CS 411 X	Cloth	24, 36, 40, 50, 60, 80, 120		PSA
	CS 411 YX	Polyester	80, 120		
	CS 411 Y	Polyester	24, 36, 40, 50, 60		
	CS 416 Y	Polyester	24, 36, 40, 50, 60, 80, 100, 120		
	CS 565	Vulcanized fibre	24, 36, 40, 50, 60, 80, 100		
	CS 570	Vulcanized fibre	24, 36, 50, 60, 80, 100, 120	Multibond lubricant	
CERAMIC ALUMINUM OXIDE	CS 922 Y ACT	Polyester	80, 100, 120, 150, 180		PSA
	CS 922 YY	Polyester	36, 40, 50, 60		PSA
	CS 920 Y ACT	Polyester	80	Multibond lubricant	PSA
	CS 920 YY ACT	Polyester	24, 36, 40, 50, 60	Multibond lubricant	PSA
	FS 964 ACT	Vulcanized fibre	24, 36, 40, 50, 60, 80, 120		
	FS 966 ACT	Vulcanized fibre	24, 36, 40, 50, 60, 80, 120	Multibond lubricant	

ACT Advanced Coating Technology, ○ Open Coat, ◐ Semi Open Coat, ● Closed Coat, R = Resin, G = Glue



Info for Chart for Coated Abrasives

Description	Type	Jumbo Width	Coating	Bonding agent	Waterproof	Application	Rolls	Short and long belts	Dynafle Belts	Fibre discs	Strips/Sheets	Discs
ALUMINUM OXIDE	PS 33 B	49	☉	R		Paint/Varnish/Primer, Wood	•	-	-	-	•	•
	PS 33 C	49	☉	R		Paint/Varnish/Primer, Wood	•	-	-	-	•	•
	PS 73 BW	49	☉	R		Metal, Fiberglass, Paint/Varnish/Primer, Wood, Plastic/Rubber	•	-	-	-	•	•
	PS 73 CW	49	☉	R		Metal, Fiberglass, Paint/Varnish/Primer, Wood, Plastic/Rubber	•	-	-	-	•	•
	VP 73 CW	49	☉	R		Metal, Fiberglass, Paint/Varnish/Primer, Wood, Plastic/Rubber	•	-	-	-	•	•
	FP 73 W	49	☉	R	✓	Metal, Fiberglass, Paint/Varnish/Primer, Wood, Plastic/Rubber	-	-	-	-	-	•
	PS 77	49	☉	R		Metal, Fiberglass, Paint/Varnish/Primer, Wood, Plastic/Rubber	•	-	-	-	•	•
	FP 77	49	☉	R	✓	Metal, Fiberglass, Paint/Varnish/Primer, Wood, Plastic/Rubber	•	-	-	-	•	•
	CS 308 YX	61	●	R		Metal, Wood	•	•	•	-	-	-
	CS 310 XF	61	●	R		Metal, Wood	-	•	•	-	-	-
	KL 361 JF	49	●	R		Metal, Wood	•	-	-	-	•	-
	CS 561	61	●	R		Metal	-	-	-	•	-	-
	KLINGNET			○	R	Fiberglass, Paint/Varnish/Primer, Wood, Composite	-	-	-	-	•	•
SILICON CARBIDE	PS 11 A	46	●	R	✓	Glass & Stone, Paint/Varnish/Primer, Plastic/Rubber	•	-	-	-	•	•
	PS 11 C	46	●	R	✓	Glass & Stone, Paint/Varnish/Primer, Plastic/Rubber	•	-	-	-	•	•
	PS 35 BW	57	○	R		Paint/Varnish/Primer	•	-	-	-	•	•
ALUMINA ZIRCONIA	PS 21 F	57	●	R		Metal, Stainless Steel, Wood	•	•	-	-	-	•
	PS 36 CW	49	☉	R		Metal, Stainless Steel, Wood	•	-	-	-	•	•
	PS 36 DW	49	☉	R		Metal, Stainless Steel, Wood	•	-	-	-	•	•
	CS 409 Y	61	●	R	✓	Metal, Stainless Steel	-	•	•	-	-	-
	CS 409 YX	61	●	R	✓	Metal, Stainless Steel	-	•	•	-	-	-
	CS 411 X	61	●	R		Metal, Stainless Steel	•	•	-	-	-	•
	CS 411 YX	61	●	R	✓	Metal, Stainless Steel	•	•	•	-	-	-
	CS 411 Y	61	●	R	✓	Metal, Stainless Steel	•	•	•	-	-	-
	CS 416 Y	61	☉	R	✓	Metal, Stainless Steel	-	•	•	-	-	-
	CS 565		●	R		Metal, Stainless Steel	-	-	-	•	-	-
	CS 570		●	R		Metal, Stainless Steel	-	-	-	•	-	-
CERAMIC ALUMINUM OXIDE	CS 922 Y	61	●	R	✓	Metal, Stainless Steel	-	•	•	-	-	•
	CS 922 YY	61	●	R	✓	Metal, Stainless Steel	-	•	•	-	-	•
	CS 920 Y	61	●	R	✓	Metal, Stainless Steel	-	•	•	-	-	•
	CS 920 YY	61	●	R	✓	Metal, Stainless Steel	-	•	•	-	-	•
	FS 964		●	R		Carbon Steel, Metal	-	-	-	•	-	-
	FS 966		●	R		Metal, Stainless Steel	-	-	-	•	-	-

10" Discs & Larger Only


Quick Change Discs

Quick change discs offer instant disc changes, assurance that the disc is centered and they are smooth running. All work well on flat surfaces and most will perform well on contoured surfaces as well. KLINGSPOR's quick discs offer rapid stock removal on such jobs as general purpose grinding, blending, cleaning and deburring and removal of weld beads and flash.

QDC DISCS utilize a "T" locking device. The backing plate of the disc is a firm nylon that is heat and wear resistant. The center of the backing plate has a raised "hub" with a slot. The accompanying mandrel has the "T" connector which fits into the slotted backing plate and locks with a quarter turn. This system holds the disc firmly in place for the life of the disc.

QRC DISCS feature a common male (screw type) hub on the back of the disc. These discs mount easily into our standard Quick Roll Connect holder pad or into the popular Roloc® holder pad with a simple half turn. Stays secure through use of the disc.

QMC DISCS feature a metal locking device centered on the backing of the disc. This simply twists into the the all-metal attachment on the holder pad to lock in place. These discs must be used with the Quick Metal Connect holder pad or the popular SocAtt® style holder pad.

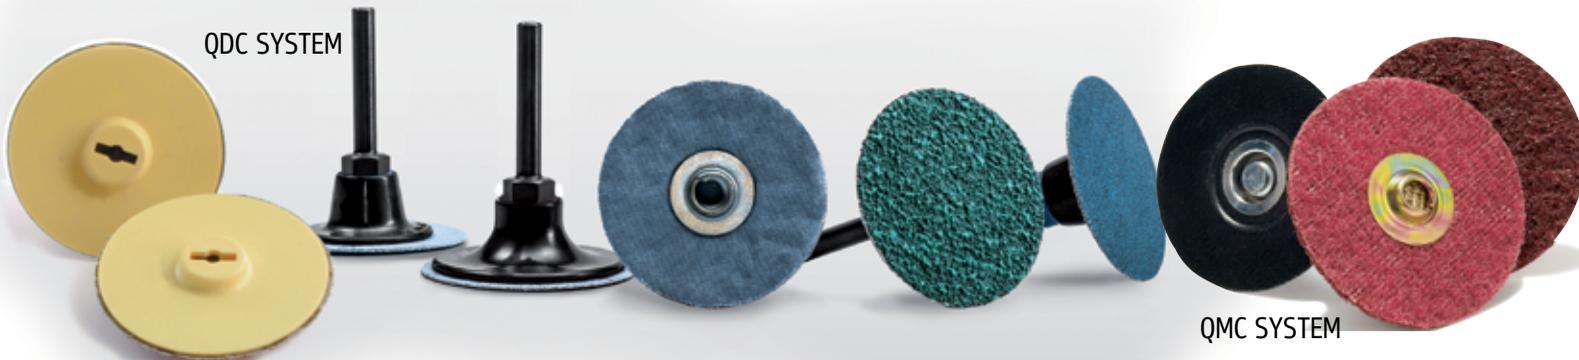

Quick Disc Connect (QDC)/Quick Metal Connect (QMC)/Quick Roll Connect (QRC) Zirconia

Diameter	Box Qty	Max RPM	80 Grit	60 Grit	50 Grit	40 Grit	36 Grit	24 Grit
1 1/2"	100	30,000	✓	✓	✓	✓	✓	✓
2"	100	20,000	✓	✓	✓	✓	✓	✓
3"	50	20,000	✓	✓	✓	✓	✓	✓

QDC Discs must be used with KLINGSPOR Steel Mandrels.

Non-Woven QDC/Non-Woven QRC/Non-Woven QMC **25 PER BOX**

Diameter	Box Qty	Very Fine, Medium, Coarse
2"	25	✓
3"	25	✓

QDC Discs must be used with KLINGSPOR Steel Mandrels.



STEEL MANDRELS

Holder Pads for Quick Roll Connect (QRC)/Quick Metal Connect Discs (QMC) **1 EACH**

Diameter	Density	Max RPM	QRC	QMC
1 1/2"	Medium	25,000	QRHOLDER1.5MED	QMHOLDER1.5MED
1 1/2"	Firm	30,000	QRHOLDER1.5FIRM	QMHOLDER1.5FIRM
2"	Medium	25,000	QRHOLDER2.0MED	QMHOLDER2.0MED
2"	Firm	30,000	QRHOLDER2.0FIRM	QMHOLDER2.0FIRM
3"	Medium	25,000	QRHOLDER3.0MED	QMHOLDER3.0MED
3"	Firm	30,000	QRHOLDER3.0FIRM	QMHOLDER3.0FIRM

Steel Mandrels for QDC Discs - 1/4" Shank

Sizes Available	Styles
1" - 1 1/2"	SL100 Mandrel
2", 3", 4"	SL101 Mandrel

1 EACH


QUICK CHANGE DISC COMPETITIVE COMPARISONS

KLINGSPOR	3M	STANDARD ABRASIVES	MERIT
Quick Roll Connect (QRC)	Roloc® TR	Lockit®	Power-Lock® Type III
Quick Metal Connect (QMC)	Roloc® TS	SocAtt®	Power-Lock® Type II
Quick Disc Connect (QDC)	N/A	N/A	N/A





QUICK LOCK FIBRE DISCS ARE ALSO AVAILABLE. CALL US FOR PRICING AND SIZES.



Fibre Discs

Weld grinding and blending, general metal clean-up, and rust and paint removal are easy tasks for KLINGSPOR Fibre Discs. A choice of several varieties lets you choose the right disc for the right job.

CS565 ALUMINA ZIRCONIA FIBRE DISCS

CS570 LUBRICATED ALUMINA ZIRCONIA FIBRE DISCS

PACKAGED 25 PER BOX

Diameter	Max RPM	80+Finer Grit	50 Grit	36 Grit	24 Grit
4 1/2" x 7/8"	13,300	✓	✓	✓	✓
5" x 7/8"	12,200	✓	✓	✓	✓
7" x 7/8"	8,600	✓	✓	✓	✓

RUBBER FIBRE DISC BACKING PADS

Size	Item#
4 1/2" (5/8" - 11)	BP001
5" (5/8" - 11)	BP002
7" (5/8" - 11)	BP003

PHENOLIC BACKING PLATES

Size	Item#
4 1/2"	FBP-4.5
5"	FBP-5
7"	FBP-7

EASY ACCESS CHART FOR FIBRE DISCS

Name	Available Grits	Application
CS565 Premium Alumina Zirconia Fibre Disc	24, 36, 50, 60, 80, 100	Very aggressive metal & weld grinding and heavy paint removal
CS570 Premium Alumina Zirconia Fibre Disc - lubricated	24, 36, 50, 60, 80, 100, 120	Aggressive metal & weld grinding where heat must be kept to a minimum

GRINDING DISCS TYPE 27 DEPRESSED CENTER

These high performance wheels will handle virtually any grinding or cutting job. Grinding welds, finishing surfaces, and cutting out auto body panels are perfect applications for these premium grinding discs and cut-off wheels. **Refer to**

page 16 for small cut-off blades for precise cutting out of imperfections in auto panels. **Packaged 10 per box.**



Size	Grit	Application	RPM	Item #
4" x 1/4" x 5/8"	A24Extra	Metal GP	15,300	A24E1006.016D
4 1/2" x 1/4" x 7/8"	A24Extra	Metal GP	13,300	A24E1156.022D
4 1/2" x 1/4" x 5/8"-11 hub	A24Extra	Metal GP	13,300	A24E1156.022A
5" x 1/4" x 7/8"	A24Extra	Metal GP	12,200	A24E1256.022D
5" x 1/4" x 7/8"-11 hub	A24Extra	Metal GP	12,200	A24E1256.022A

Size	Grit	Application	Item #
7" x 1/4" x 7/8"	A24Extra	Metal GP	A24E1786.022D
7" x 1/4" x 5/8"-11 hub	A24Extra	Metal GP	A24E1786.022A

Maximum operating speed - 16,000 surface feet per minute (SFPM). For use with portable tools. RPM=8,500

Maximum operating speed - 16,000 surface feet per minute (SFPM). For use with portable tools.

Flap Discs



SMT 628 FLAP DISC

The SMT 628 is a flat-shaped version which makes it versatile for grinding on flat surfaces. Also made with our durable alumina zirconia grains. Sold in boxes of 10.

Size	Available Grits
4 1/2"	120, 80, 60, 50, 40, 36, 24



SMT 636 FLAP DISC

Our popular SMT 636 alumina zirconia flap disc with a multibond lubricant now has a new backing plate structure. It is a consumable fibre-reinforced backing just like our other SMT flap discs and with a new 12° convex angle. The 636 is best-suited for cooler edge grinding of stainless steel. Sold in boxes of 10.

Size	Available Grits
4 1/2"	120, 80, 60, 40, 36

NOTE: Additional charge for 5/8"-11 hubs

SMT 650 JUMBO FLAP DISC

Here's our longest lasting flap disc ever - the SMT 650 ALUMINA ZIRCONIA disc. This is a double-thick disc that offers twice the grinding power and substantially less downtime from disc changing. We like to call the SMT 650 the "JUMBO". Sold in boxes of 10.

MAXIMUM RPM'S: 4 1/2": 13,000



Size	Available Grits
4 1/2"	80, 60, 40, 36



SMT 974 SPECIAL



HIGHEST STOCK REMOVAL DISC ON THE MARKET



Size	Available Grits
4 1/2"	80, 60, 40

MAXIMUM RPM'S: 4 1/2": 13,300

Always use with lock nut flange.

SMT 800 NON-WOVEN FLAP DISC *The flexibility of non-wovens in a flap disc.*

High quality non-woven web abrasive mop disc for finishing work. Depending on the degree of hardness, these are also suited for cleaning and light de-burring work and the processing of TIG-welded seams on stainless steel. The SMT 800 will also leave a pleasant finish on most metals and steels. Sold in boxes of 5.

MAXIMUM RPM'S: 4 1/2": 13,300



Size	Available Grits
4 1/2"	Coarse, Medium, Very Fine



NCD 200 POWER WHEEL FLAP DISC *Powerful cleaning with the design of a flap disc.*



Here's a disc that will clean rust, scale, paint, varnishes, or other surface imperfections. The NCD 200 is made of a coarse cleaning material imbedded with silicon carbide grains – the most effective for aggressive cleaning and removal applications. The high edge strength allows you to apply the necessary pressure without damaging the disc. 4-1/2". Sold in boxes of 5. **MAXIMUM RPM'S: 4 1/2": 11,000**

Quick Change Flap Discs

Simply affix the die-cast backing plate to your angle grinder using a standard locking nut and leave it there. Then the CMT "loadings" are locked into place with a quick turn of the wrist. No tools are necessary to accomplish the task, which only takes seconds. When a new grinding surface is needed or when grits need to be changed, twist the CMT off and put a new one on. No more fumbling with the grinder's locking nut each time - twist on, twist off. Sold in boxes of 10.

Easy to change in just a few simple steps.




Use your standard locking nut to fasten the backing plate in place.




Match the CMT "loading" to the backing plate.

CMT 726 - ALUMINA ZIRCONIA

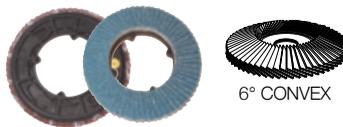

6° CONVEX

CMT 728 - ALUMINA ZIRCONIA

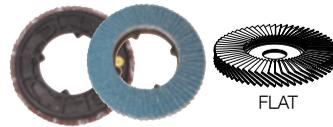

FLAT

CMT 730 - MULTIBOND ALUMINA ZIRCONIA



6° CONVEX

Size	Quantity	Max RPM	120 Grit	80 Grit	60 Grit	40 Grit
4 1/2"	Box Qty 10 per each	12,000	•	•	•	•

5/8"-11 hubs are available



CMT 800 - NON-WOVEN

6° CONVEX

Size	Max RPM	Coarse	Medium	Very Fine
4 1/2" Box Qty 10 per box	12,000	•	•	•

ADJUSTABLE SPANNER WRENCH
#BPS900001

4 1/2" BACKING PLATE



● = Best Application ○ = Also Suitable

			Steel	Tool Steel	Sheet Metal	Stainless Steel	High Alloy Stainless Steel	Stainless Sheet Metal	Titanium	Aluminum	Bronze	Plastic	Paint/Lacquer	Wood	Surface Grinding	Weld Seams	Edge Grinding	Contours	
MATERIAL			SHAPE																
EXTRA	SMT 325	Alumina Zirconia	Flat	●	●	●	●	●	●						○	●	●	○	
	SMT 325	Alumina Zirconia	Convex	●	●	●	●	●	●						○	●	●	○	
SUPRA	SMT 624	Alumina Zirconia	Convex	●	●	●	●	●								○	●	●	
	SMT 626	Alumina Zirconia	Convex	●	●	●	●	●	○						○	●	●	○	
	SMT 314	Aluminum Oxide	Convex	●	●	●				●	●	○	○	●		○	●	●	
	SMT 628	Alumina Zirconia	Flat	●	●	●	●	●	○						●	●	○		
SPECIAL	SMT 636	Alumina Zirconia Multibond	Convex	○	●	○	●	●		●						○	●	●	
	SMT 640	Alumina Zirconia	Flat	○	●	○	●	●							●	●	○		
	SMT 650	Alumina Zirconia	Flat/Jumbo	●	●	●	●	●							●	●	○		
	SMT 926	Alumina Zirconia	Convex	●			●								○	●	●	○	
	SMT 996	Ceramic Aluminum Oxide	Convex	○	○	○	●	●	○										
	SMT 800	Non-Woven	Convex	●	○	○	●	○	●	○	○								
	SMT 850	Aluminum Oxide Multibond / NW	Convex	●	○	○	●	●	●	○	○					●	●	○	●
	CMT 726	Alumina Zirconia	Convex	●	●	●	●	●	○						○	●	●	○	
CMT 728	Alumina Zirconia	Flat	●	●	●	●	●	○						●	●	○			
CMT 730	Multibond Alumina Zirconia	Convex	○	●	○	●	●	●	●						○	●	●		
CMT 800	Non-Woven	Convex	●	○	○	●	○	●	○	○									
NCD 200	Cleaning Wheel	Flat			○	○						○	●	○	●	●	○		

Description	Type	Thickness	Steel	Hardened Steels	Tool Steel	Stainless Steel	High Alloy Steels	Corrosion & Acid Proof Steels	Aluminum	Bronze	Copper	Brass	Zinc, Die-Casting	Cast Iron	Stone/Concrete	Asphalt	
			●	●	●	●	●	●	●	○	○	○	○	○	○	○	○
Cut Off Wheel for Angle Grinder	A 980 TZ SPECIAL	1/32	●	●	●	●	●	●	○	○	○	○	○	○	○	○	
	A 960 TZ SPECIAL	.045	●	●	●	●	●	●	○	○	○	○	●	○			
	Z 960 TX SPECIAL	.045	●	●	●	●	●	●	○	○	○	○	●	○			
	K 960 TX SPECIAL	.045	●	●	●	●	●	●	○	○	○	○	●	●			
	A 60 TZ SPECIAL INOX	.045	●	●	●	●	●	●	○	○	○	○	●	○			
	A 60 N SUPRA	.045	○	○	○	○	○	○	●	●	●	●	○	○			
	A 46 TZ SPECIAL INOX	1/16	●	●	●	●	●	●	○	○	○	○	●	○			
	A 946 TZ SPECIAL	1/16	●	●	●	●	●	●	○	○	○	○	●	○			
	A 24 EXTRA	3/32 - 1/8	●	○	●	○	○	○	○	○	○	○	○	○			
	C 24 EXTRA	3/32 - 1/8														●	
	A 24 R SUPRA	3/32 - 1/8	●	●	●	○	○	○						○	○		
	A 24 N SUPRA INOX	3/32 - 1/8	○	●	○	●	●	●	○	○	○	○					
	A 46 N SUPRA	3/32 - 1/8								●	●	●	○				
	Die Grinder	A 660 R SUPRA small cut off wheel	3/64 - 1/16	●	●	●	●	○	○	○	○	○	○	○	○		
for Low Powered Chop Saw	A 330 N SPECIAL	3/32 - 9/64	●	○	○	○	○	○	○	○	○	○	○	○			
	A 630 N SUPRA	3/32	●	○	○	○	○	○	○	○	○	○	○	○			
	A 930 N SPECIAL	1/8	●	○	○	○	○	○	○	○	○	○	○	○			
for Stationary Machine	A 24 N SUPRA INOX	9/64	○	●	●	●	●	●	○	○	○	○	○				
	A 24 R SUPRA	1/8 - 3/16	●	●	●	○	○	○						○			
for Gas Powered Saw	A 924 R SPECIAL	9/64 - 5/32	●	●	●	●	●	●						○			
	A 924 SX SPECIAL	5/32	●	●													
Dual Use for Angle Grinder	TS 30 AP SPECIAL	1/8	○	○	●	●	●	●									
	A 46 VZ SPECIAL	5/64	○	○	●	●	●	●									
Grinding Discs for Angle Grinder	A 24 EXTRA	1/4	●	○	○	○	○	○					○	○			
	A 24 R SUPRA	1/4	●	●	●	○	○	○						○			
	A 24 N SUPRA INOX	1/4	○	●	○	●	●	●						○			
	A 24 S SPECIAL	1/4	○	○	○	○	○	○						●			
	C 24 R SUPRA	1/4													●	○	
	A 24 TX SPECIAL	1/4	○	○	○	○	○	○						●			
	A 30 M SPECIAL	1/4	○	●	○	●	●	●						○			
	A 46 N SUPRA	1/4							●	○	○	○	○				

○ Possible Application, ● Ideal Application

MOUNT BY SIMPLY SPINNING IT ON! NO TOOLS OR MOUNTING NUT NEEDED!

SMT 624 T TITAN



SPECIFICATIONS

- Alumina Zirconia
- High level of aggression
- Angled for effective grinding of welds, contoured surfaces, and edges
- Well suited for use on high-powered grinders

APPLICATIONS

- Weld seam work
- Edge work/beveling
- Universal metal & steel
- Stainless steel/High alloy stainless steel

Diameter	Bore Size	Grit	Availability
4-1/2"	5/8"-11	120	Flat
10/Box	5/8"-11	80	Convex or Flat
	5/8"-11	60	Convex or Flat
	5/8"-11	40	Convex or Flat
	5/8"-11	60	Convex



MAXIMUM RPM'S: 13,300

SMT 800 T TITAN



SPECIFICATIONS

- Full non-woven abrasive flap disc
- Perfect for satin finishes on stainless
- Best results are achieved with a variable speed grinder

APPLICATIONS

- Rust & varnish removal
- Heat tinting and oxide film removal
- Universal metal & steel
- Stainless steel/High alloy stainless steel
- Aluminum & non-ferrous metals

Diameter	Bore Size	Grit	Color
4-1/2"	5/8"-11	very fine	green
5/Box	5/8"-11	medium	maroon
	5/8"-11	coarse	brown



**MAX RPM = 13,300
RECOMMENDED RPM 7,000**

SMT 850 T TITAN



SPECIFICATIONS

- Combination of coated and non-woven abrasives
- Coated abrasive with multibond lubricant allows for cooler finishing on stainless
- Produces a beautiful satin finish
- Best results achieved with a variable speed grinder

APPLICATIONS


- Finish grinding on flat and contoured surfaces
- Weld seam work
- Universal metal & steel
- Stainless steel/High alloy stainless steel
- Aluminum & non-ferrous metals

Diameter	Bore Size	Grit	Color
4-1/2"	5/8"-11	very fine	green
5/Box	5/8"-11	medium	maroon
	5/8"-11	coarse	brown



**MAX RPM = 13,300
RECOMMENDED RPM 7,000**

SMT 950 T-XL TITAN



SPECIFICATIONS

- Alumina Zirconia Grain
- 20% more flaps for our thickest disc!
- Our Longest Lasting Flap Disc
- High Level of aggression
- Offered in angled or flat for diverse applications.
- Best suited for use on high powered grinders

APPLICATIONS

- Weld seam work
- Edge work/beveling
- Universal metal & steel
- Stainless steel/High alloy stainless steel

Diameter	Bore Size	Grit
4-1/2"	5/8"-11	120
10/Box	5/8"-11	80
	5/8"-11	60
	5/8"-11	40



MAXIMUM RPM: 13,300

SMT 975 T TITAN



SPECIFICATIONS

- Newly developed ceramic grain
- High level of aggression for faster cutting and high removal rates
- Best suited for use on high-powered grinders

APPLICATIONS

- Weld seam grinding
- Edge grinding and beveling
- Universal for metals and steels

Diameter	Grit	Availability
4-1/2"	5/8"-11	80
10/Box	5/8"-11	60
	5/8"-11	40



MAXIMUM RPM: 13,300

Extra Cut-Off Wheels



BOX OF 40

Item #	Size	RPM
A660R0761.010F-40	3" x 3/64" x 3/8"	25,200
A660R0761.010F-40	3" x 3/64" x 3/8"	25,200
A660R0761.010F-40	3" x 3/64" x 3/8"	19,000

MANDREL For 1/4" & 3/8" Tools

Item #	Size
ARBOR1/4-3/8X1/4SL	1/4" & 3/8"

Ultra-Thin Cut-off Wheels

1 (flat) or type 27 (depressed center), these wheels perform well on a variety of different materials and applications.



A 960 TZ Special Stainless Steel, Stainless Steel Sheets and Container Construction

Size	Grit	Box Qty	Max RPM	Item #
4 1/2" x .045" x 7/8" TYPE 27	A960TZ	25	13,300	A960TZ1151.022D
5" x .045" x 7/8" TYPE 27	A960TZ	25	12,200	A960TZ1251.022D
4 1/2" x .045" x 7/8"	A960TZ	25	13,300	A960TZ1151.022F
5" x .045" x 7/8"	A960TZ	25	12,200	A960TZ1251.022F

Super Thin!



Bristle Discs

Provide high cut while the flexible plastic brings superior cleaning to a wide variety of surface areas, without damaging the work piece. Eliminates flying wires common with traditional wire brushes.



Item#	Size	Color	Grit
DYNA92015	2"	Green	50 Grit
DYNA92016	2"	Yellow	80 Grit
DYNA92017	2"	White	120 Grit
DYNA92021	3"	Green	50 Grit
DYNA92022	3"	Yellow	80 Grit
DYNA92023	3"	White	120 Grit

Cut-Off Wheels (Chop Saw Blades)

As one of the world's leaders in the production of cut-off wheels, KLINGSPOR has the ideal wheel for virtually any cutting application. Discs are available for the cutting of ferrous and non-ferrous metals as well as masonry, glass, and other specialty materials. Sizes from 12" and 14" in diameter.

Item #	Description
12" x 3/32" x 1	A 330N 3002.525F FC
14" x 1/8" x 1	A 630N 3502.525F FC



Mini SMT

A good high performance mineral that is sharp, hard and tough. It is a versatile mineral that works well under high heat and grinding pressure applications but can also be effective on many materials at lower grinding pressure levels.

- Grind and blend welds
- Available sizes 2" & 3"
- Available grits 40, 60, 80, & 120
- Available in Zirconia and Ceramic Oxide




Power Wheel

Constructed of large nylon filament with coarse silicon carbide grain, this open structure provides aggressive removal and blending characteristics without loading. Some applications include: removal of paints and other surface coatings, cleaning of weld discoloration, blending, and removing corrosion, rust and scale.

Size and Description	Item#
4" dia. with 1/2" arbor hole	PW0004
6" dia. with 1/2" arbor hole	PW0006

The KLINGSPOR reusable arbor system is unique in that it comes with a series of "washers" which allows for the optimum in support as the wheel wears away.

Reusable arbor	PWARBOR
----------------	---------

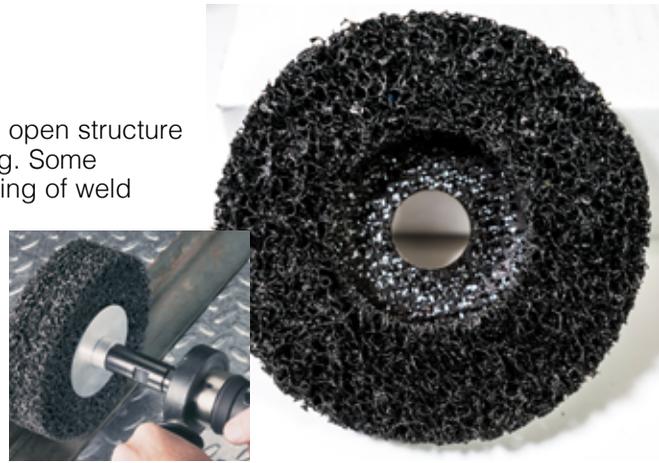

KM 613 Abrasive Flapwheels

These little wonders perform just like their large counterparts, the flapwheel, but are mostly used in the automotive industry where sanding in tight places is necessary. The spindle mounted flapwheel will easily chuck into a 1/4" tool and will offer the finishing touch, even in hard to reach areas. Spindle mounted.



Dia x-Width x-Spindle	Max RPM
1" x 1/2" x 1/4"	22,900
1" x 1" x 1/4"	22,900
1 1/2" x 1/2" x 1/4"	17,100
1 1/2" x 1" x 1/4"	17,100
2" x 1/2" x 1/4"	13,700
2" x 1" x 1/4"	13,700
2 1/2" x 1" x 1/4"	11,400
2 1/2" x 2" x 1/4"	11,400
3" x 1/2" x 1/4"	8,500
3" x 1" x 1/4"	8,500
3" x 2" x 1/4"	8,500

Power Disc

KLINGSPOR's Power Discs are made from the same material as the Power Wheel. But it is now available in a the QDC "Quick Disconnect" & QRC "Quick Roll Connect" backing for tighter spots and better control. Applications include striping paint & coatings, cleaning of weld discoloration, and removal of corrosion, surface rust, and scale. The new QDPD & QRCPD will be available in 2" & 3".



Form	Size	Item#
QDC	2"	QDPD200
QDC	3"	QDPD300
QDC	4"	QDPD400
QRC	2"	QRCPD200
QRC	3"	QRCPD300

Angle Grinder Mop

The WSM 617 abrasive flapwheel is a revolutionary new product from KLINGSPOR for removing paint to bare metal on automotive body parts. No other paint-stripping product on the market is as easy to use nor leaves as smooth of a finish. With its solid center containing a 5/8"-11 threaded hole, this unique flapwheel is designed for use on your standard 4 1/2" angle grinder.



Size	Grit	Item#
4 1/2" x 3/4" x 5/8" -11	40	61704011502016
4 1/2" x 3/4" x 5/8" -11	60	61706011502016
4 1/2" x 3/4" x 5/8" -11	80	61708011502016
4 1/2" x 3/4" x 5/8" -11	120	61712011502016

Available Grits: 60, 80, 120, 180, 240. Price per Flapwheel.

Shop Rolls

This could very well be the best shop roll material in the world. Numerous applications from maintenance to general quick use make these very versatile. 50 meter roll in a dispenser box. Available grits: 40, 50, 60, 80 and 100 - 600 Available sizes: 1", 1-1/2" and 2"

Intermediate widths use next higher list price.



Wire Brushes and Wheels

As a leader in the coated and bonded abrasive markets, it is only natural that KLINGSPOR develop and excel in another abrasive field. KLINGSPOR is pleased to be able to offer to you our high quality line of wire wheels and brushes. The uses for wire wheels and brushes are ever expanding and with this fact, KLINGSPOR knows that playing a role in this market is important.

The KLINGSPOR line embodies the main types of wire products with a focus on basic application needs. Included in the line are both carbon steel and stainless steel versions of knot wheels, crimped wheels, cup wheels, stringer bead wheels, and end brush wheels to name a few. With this assortment, the KLINGSPOR line satisfies most wire wheel requirements.

Crimped Cup Wheel (CC)

AVAILABLE IN: CARBON STEEL



KWW-381930 3" x 5/8-11", .014, trim 1¹/₈"
MAX RPM 14,000

KWW-381932 4" x 5/8-11", .020, trim 1¹/₈"
MAX RPM 9,000

KWW-099641 6" x 5/8-11", .014, trim 1¹/₈"
MAX RPM 6,000

Crimped END Brush Wheel (CEB)

AVAILABLE IN: CARBON STEEL



KWW-301611 3/4" x 1/4", .020,
Trim 1¹/₈" MAX RPM 18,000

KWW-026511 1" x 1/4", .020,
Trim 1¹/₈" MAX RPM 18,000

KWW-381926 3/4" x 1/4", .014,
Trim 1¹/₈" MAX RPM 20,000

Twisted Knot Cup Wheel (TKC)

AVAILABLE IN: CARBON STEEL (CS) AND STAINLESS STEEL (SS)



KWW-381996 2³/₄" x 5/8-11, CS, .020
Trim 1¹/₄", 18 Knots
MAX RPM 12,500

KWW-381999 2³/₄" x 5/8-11, SS, .020
Trim 1¹/₄", 18 Knots
MAX RPM 12,500

KWW-382000 4" x 5/8-11, CS, .020
Trim 1¹/₈", 18 Knots
MAX RPM 9,000

Twisted Knot End Brush (TKEB)

AVAILABLE IN: CARBON STEEL (CS) AND STAINLESS STEEL (SS)



KWW-381835 3/4" x 1/4", CS, .020,
Trim 1¹/₈", 9 Knots
MAX RPM 20,000

KWW-381833 3/4" x 1/4", CS, .014,
Trim 7/8", 9 Knots
MAX RPM 20,000

KWW-381834 3/4" x 1/4", SS, .020,
Trim 7/8", 9 Knots
MAX RPM 20,000

KWW-381830 1¹/₈" x 1/4", CS, .014,
Trim 7/8", 9 Knots,
MAX RPM 18,000

KWW-027441 1¹/₈" x 1/4", SS, .020,
Trim 7/8", 9 Knots,
MAX RPM 18,000

Cable Twist Knot Wheel (CTKW)

AVAILABLE IN: CARBON STEEL (CS) AND STAINLESS STEEL (SS)



KWW-264871 4" x 5/8-11", .020, CS,
Trim 1", F 3/8, 20 Knots,
MAX RPM 20,000

KWW-263411 4" x 5/8-11", .020, SS,
Trim 1", F 3/8, 20 Knots,
MAX RPM 20,000

Standard Twisted Knot Wheel (STKW)

AVAILABLE IN: CARBON STEEL (CS) AND STAINLESS STEEL (SS)



KWW-265871 4" x 5/8-11", CS, .014 trim 1"
MAX RPM 20,000

KWW-265931 4" x 5/8-11", SS, .014 trim 1"
MAX RPM 20,000

KWW-381734 6" x 5/8-11", CS, .020 Trim 1¹/₄"
MAX RPM 9,000

Stringer Bead Twist Wheel (SBTW)

AVAILABLE IN: CARBON STEEL (CS) AND STAINLESS STEEL (SS)



KWW-382065 4" x 5/8-11", CS, .020 trim 7/8"
MAX RPM 20,000

KWW-382066 4" x 5/8-11", SS, .020 trim 7/8"
MAX RPM 20,000

KWW-382068 6" x 5/8-11", CS, .020 trim 1"
MAX RPM 12,500

KWW-382069 6" x 5/8-11", SS, .020 trim 7/8"
MAX RPM 12,500

KWW-269061 7" x 5/8-11", SS, .020 trim 7/8"
MAX RPM 12,500

Stem Mounted Knot Wheel (SMKW)

AVAILABLE IN: CARBON STEEL (CS) AND STAINLESS STEEL (SS)



KWW-038861 3" x 1/4", CS, .014, 1/4" stem
MAX RPM 25,000

KWW-038981 3" x 1/4", SS, .014, 1/4" stem
MAX RPM 25,000

LIMITED QUANTITIES!



\$471.00

CABINET924

LIMITED OFFER! When you buy \$400 of products of which \$300 needs to be KLINGSPOR branded products — Get the KLINGSPOR lockable metal supply cabinet AND the products combined for only \$471.00

877-456-5566



**ADVANTAGES OF THE
KLINGSPOR CABINET:**

1. Keep supplies organized
2. Contained location
3. Less time for employees locating supplies

www.klingspor.com/autobody





Shop Pads & Accessories

SMART PINSTRIPE ERASER

A 3 1/2" molded rubber pad with a 5/16"-24 thread arbor used for pinstripe removal. Used with the 400E-AR arbor.



Item #	Description
ASTR0400E	Eraser Pad
ASTR0400E-AR	Arbor

PAINT PENS

Item #	Description
DY84003	White
DY84004	Yellow
DY84005	Orange
DY84006	Red

FIRM HAND PAD WITH HOLES

A firm hand pad for use with three fold wet or dry sandpaper. Designed for use on almost any shape or surface.



KL02655	2 1/2" x 5"
---------	-------------



HAND PALM SANDER

This pad is a convenient tool for all hand sanding applications and is available in 5" and 6" diameters.

FPS-35V	Molded Hand Palm Sander	3" x 5"
FPS-50V	Hand Palm Sander	5" x N/H
FPS-60V	Hand Palm Sander	6" x N/H

HAND BLOCK

Ergonomically designed to fit your hand, this hand block uses standard 6" discs for hand sanding. The pad is available for use with PSA and Kling-On® discs.



HAND550V6	Hook & Loop - for use with 6" Disc
HAND550P6	PSA - for use with 6" Disc

RECIPROCATING SAW BLADES

SLM6	18 teeth 5/pack
------	-----------------

DRILL BITS

ASTR09012	1/8" Drill Bits. 12 per pack (double sided)
ASTR01721	Spot Weld Bit



SAW BLADES

ASTR05SAW	24 TEETH
ASTR05SAWR	32 TEETH

DRAW PINS

Copper coated steel studs, soft for easy flexing and grinding, delivers a 500 # plus pull. Made in the USA.

MOTOR00545	2.0 MM Draw Pins - 500 PK
MOTOR00555	2.5 MM Draw Pins - 500 PK



SANDING BOARD



Sanding and filing of auto body plastic is easier, faster and more economical with the KLINGSPOR Sanding Board. This lightweight, rugged board has a cushioned surface.

Spring clips mounted at each end securely hold 2-3/4" x 17-1/2" abrasive sheets. The KLINGSPOR stiff sanding longboard may be used with 2-3/4" by 16-1/2" PSA sheets.

77526	11" Sanding Board
77527	17" Sanding Board

SANDING BOARD



SIZE: 2-3/4" X 15"

FJ27515V

PSA

FJ27515H

HOOK & LOOP

877-456-5566

Sanding Blocks

SB-1 Soft Block



MOTOR00746

The original flexible sanding block features two different densities to achieve the ultimate in block sanding of curved or irregularly shaped surfaces.

Size: 2-5/8"x5-1/4"

Application: Wet & Dry Sanding, Color Sanding

WB-1 Wonder Block



MOTOR00740

A large, ergonomically designed block with a unique profile that offers maximum gripping power over flat to slightly curved surfaces.

Size: 2-1/2"x 6-1/2"

Application: Dry Sanding, Color Sanding, PSA Rolls or Sheets

RK-1 Rocker Block



MOTOR00744

Wrap a 6" PSA sanding disc around this block for any type of sanding. Features a unique radius edge for contour sanding. Rigid inner layer prevents transfer of finger marks.

Size: 2-3/4"x6"

Application: Wet & Dry Sanding, Filler Sanding, Color Sanding, Contour Sanding

RKH-1

Hook & Loop Rocker Blocks



MOTOR00728

Rocker Block models designed for 6" hook and Loop faced abrasive discs. Designed to reduce consumable costs and make quick work of sanding contours.

Big Blocks

BG6-1

Standard Big Block



MOTOR00731

Power up hand sanding with these large blocks that feature multi-layer construction and radius edges to match contours.

Size: 2-5/8"x6-1/2"

Application: Dry Sanding, Filler Sanding, Blocking

BGK6-1/BGK12-1

Hook Faced Big Blocks



MOTOR00764 - 6" or MOTOR00767 - 7" - 12"
Hook Faced Big-Blocks in 6-1/2" (BGK6-1) and 12" (BGK12-1) lengths. Grips loopedbacked abrasive sheets firmly while providing power and slight flexibility.

MOTOR00792

Create the ultimate blocking bar by wrapping an abrasive sheet around this narrow, rigid block. Just the right width for power blocking in small areas, this block flexes slightly to follow contours.

Size: 1-1/2"x11"

Application: Blocking and Sanding Contours and Small Areas

BGR-1 Rigid Block



MOTOR00793

An ultra-rigid sanding block that flexes just enough slightly to follow slightly curved surfaces. Use this comfort-grip block for high production blocking and other demanding applications.

Size: 2-5/8"x5-1/2"

Application: Aggressive Blocking, Filler Sanding

BGR6-1 Rigid Block



MOTOR00751

This unique two-sided block features a blue side with holes which act like a grater for 30% faster cutting. Black side is for less aggressive blocking.

Size: 2-5/8"x5-1/4"

Application: Fast Blocking, Filler Sanding, Dry Sanding

HT-1 Holey Terror



MOTOR00742

A firm vinyl side offers extreme curving power for fender crowns and motorcycle tanks. Other side features soft yet dense memory foam to reduce pressure on ribs, louvers, etc.

Size: 2-5/8"x6-1/2"


Application: Dry Sanding, Color Sanding

MOTOR00742 Memory Block


MOTOR00738 Backer Block Scuff Pad - Hard

MOTOR00739 Backer Block Scuff Pad - Soft

MB-1 Memory Block

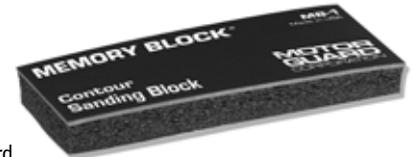

BB-1 /Soft Backer Block BBS-1 /Hard Backer Block

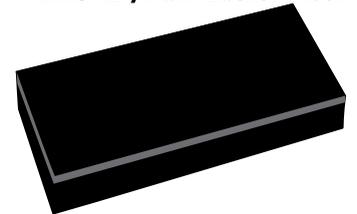

MOTOR00739 Soft

MOTOR00740 Hard

Soft and flexible for scuffing areas not accessible to rigid blocks. Designed to evenly distribute pressure, imparting an even tooth over the entire panel in a single pass.

Size: 4"x6"

Application: Scuffing

MOTOR00732

Maximum length Big-Block for fast blocking over large, flat areas. Provides enough flex for slightly curved panels.

Size: 2-5/8"x12"

Application: Dry Sanding, Filler Sanding, Blocking

BG12-1 Standard Big Block



MOTOR00726

This unique Big-Block features a hole side that acts like a grater for faster cutting. Other side is for less aggressive blocking.

Size: 2-5/8"x6-1/2"

Application: Fast Blocking, Filler Sanding, Dry Sanding

BGH6-1 Hole Side Big Block



MOTOR00727

A soft-sided Big-Block for fine color sanding quickly over large areas. Rigid inner layer prevents transfer of finger marks.


Size: 2-5/8"x6-1/2"

Application: Wet & Dry Sanding, Color Sanding

BGS6-1 Soft Side Big-Block



BGR12-1 Rigid Block

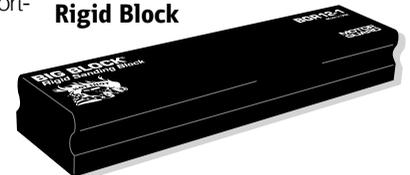

Tapes

KLINGSPOR's 777 Gold Standard Performance Tape

This masking tape that has been designed for high temperatures, automotive and industrial applications. KLINGSPOR's 777 is solvent and thinner resistant, provides instant adhesion, possesses excellent adhesion properties and sticks to a wide variety of irregularly shaped surfaces. KLINGSPOR's 777 possesses good mechanical strength and is compatible with solvent and water paints and leaves no adhesive transfer when removed. Exceptional performance in automobile repair, professional body shops and various industrial applications.

Item #	Size	Sleeve	Case
MTAPE777-075	3/4"	12	48
MTAPE777-150	1-1/2"	6	24
MTAPE777-200	2"	6	24



KLINGSPOR's 555 Silver Series Tape

This masking tape that has been designed for high temperatures, automotive and industrial applications. KLINGSPOR's 555 is solvent and thinner resistant, provides instant adhesion, possesses excellent adhesion properties and sticks to a wide variety of irregularly shaped surfaces. KLINGSPOR's 555 possesses good mechanical strength and is compatible with solvent and water paints and leaves no adhesive transfer when removed. Exceptional performance in automobile repair, professional body shops and various industrial applications.

Item #	Size	Sleeve	Case
MTAPE555-075	3/4"	12	48
MTAPE555-150	1-1/2"	6	24
MTAPE555-200	2"	6	24



PG Tape is tear, moisture & solvent resistant. It is perfect for wet sanding and provides excellent cornering - great for custom jobs as this tape provides clean removal for crisp paint lines. It is a beige, high temperature, fine crepe paper masking tape with pressure-sensitive natural rubber adhesive. Designed for clean removal from a variety of surfaces after exposure to oven temperatures up to 250°F (121°C) for 30 minutes (times and temperatures are determined by surface). Its easy handling, smooth crepe backing exhibits high strength, excellent conformability to irregular surfaces and exceptional cornering. Provides resistance to paint flaking and a clean, well defined paint line.

Item #	Size	Sleeve	Case
MTAPE-PG-075	3/4"	12	48
MTAPE-PG-100	1"	9	36
MTAPE-PG-150	1-1/2"	6	24
MTAPE-PG-200	2"	6	24



AM Tape

AM (AquaMask™) is a cost-effective masking tape designed to perform in many demanding automotive refinishing applications. The rubber-based adhesive provides secure adhesion to both painted and bare metals and plastics, yet removes cleanly without adhesive residue, paint "flaking" from backside or surface staining. Compatible with both water and solvent-based paints. UV-resistant up to three (3) days. Temperature resistant up to 250°F (107°C) for 30 minutes.

Item #	Size	Sleeve	Case
MTAPE-AM-075	3/4"	12	48
MTAPE-AM-150	1-1/2"	6	24



Premium Foam Masking Tape is specially designed polyurethane foam structure Highly absorbent to avoid any leaking and paint run Flexible Easy clean up and removal Solvent resistant Easy roll release in a box dispenser Easy to shape on contours, mask and seals all jamb Good adhesion to vehicle surface Withstands paint booth bake cycle Prevents overspray from penetrating into the jamb Improves productivity by reducing the time required to mask jambs with tape and masking paper. Leaves no residue.

Item #	Size
FOAM-MTAPE	1/2" x 55yd



Double-Sided Foam Attachment Tape

This high quality permanent attachment tape offers an easy release liner and an acrylic adhesive for attaching letters, emblems or badges. It is highly resistant to vibration, stress and weather.

TRANS4580	1/4" X 60 yards	TRANS4598	7/8" X 60 yards
TRANS4595	1/2" X 60 yards	TRANS4516	Tape Adhesion Promoter



Clear Mounting Tape

A premium double-sided tape with clear polyester reinforcement. This tape is ideal for permanent mounting of emblems and trim pieces.

MTAPE4965-050	1/2" X 33m
MTAPE4965-075	3/4" X 33m



FM-71 - Fineline Vinyl Masking Tape

uses thermally stabilized PVC backing with a rubber-based pressure-sensitive adhesive. Designed to offer a high degree of conformability without excessive stretch. Will hold and cleanly remove from surfaces in the presence of 250°F (120°C) for at least 30 minutes. Assures the user of a secure lay-down, no-residue-on, de-mask and a sharp, clean separation line. FM71 "fine line" masking tape uses thermally stabilized PVC backing with a rubber-based, pressure-sensitive adhesive.

Item #	Size
MTAPE-FM71-0125	1/8"
MTAPE-FM71-025	1/4"
MTAPE-FM71-050	1/2"



Plastic Sheeting

This anti-static plastic sheeting is excellent for protecting exteriors from paint and dust. High tensile strength sheeting resists static, is tear-resistant and can withstand at very high temperatures. Our CLING PLASTIC SHEETING provides complete overspray protection as it clings to the vehicle while the paint clings to the plastic – with no flaking. Easy for one person to handle, this sheeting will save on masking paper, tape and time costs.

Item #	Description	Size
SHEETING811	Plastic Sheeting 12'	12' x 400'
SHEETING819	"Cling" Plastic Sheeting	14' x 350'
SHEETING820	"Cling" Plastic Sheeting	16' x 350'
SHEETING821	"Cling" Plastic Sheeting	20' x 250'

Masking Papers

KLINGSPOR is pleased to be able to offer these fine masking papers for use in your shop. These are perfect for overspray applications.

Premium Green Masking Paper 30lb - 40 Basis Wt.

Item #	Description	Roll Qty
M30-06	6" x 1000 feet	6 Rolls
M30-12	12" x 1000 feet	3 Rolls
M30-18	18" x 1000 feet	2 Rolls
M30-36	36" x 1000 feet	1 Roll

White Flouro-Carbon Treated Paper 25lb-Chemical treated, solvent resistant

Item #	Description	Roll Qty
U75-06	6" x 750 feet	6 Rolls
U75-12	12" x 750 feet	3 Rolls
U75-18	18" x 750 feet	2 Rolls
U75-36	36" x 750 feet	1 Roll

Blue Plastic Coated Paper 40lb-Plastic treated, impervious to solvent bleed through

Item #	Description	Roll Qty
B75-06	6" x 700 feet	6 Rolls
B75-12	12" x 700 feet	3 Rolls
B75-18	18" x 700 feet	2 Rolls
B75-36	36" x 700 feet	1 Roll

TrimFast Masking Tape

TrimFast is an innovative product that will improve the quality of your work and increase productivity. It is designed to be used on flush mount and inset moldings around windshields and other automotive glasses. TrimFast actually pulls the molding away from the sheet metal, thus eliminating overspray and paint lines on or around the molding. The masking tape utilized in this product is the top quality PG, from American Tape.



Item #	Sizes
TRIMFAST	3/4" or 2"

Disposable Wheel Bag Maskers

Here's the ticket for total tire masking at a very affordable price - Plastic Wheel Bag Maskers. They protect against paint overspray, dust, dirt, and other contaminant's during finish repair. A built-in "cling" feature enables the bag to hug the tire for complete protection, plus it keeps the bag out of the way of air hoses and body technicians. The bags are made to hold the paint overspray to the bag so there's no blow-off or flake-off during spraying or removal of bag from tires.

Item #	Description	Qty Per Box
WHEEL BAG	16" Sport Utility/Light Truck tires	50

Reusable Wheel Bag Maskers

This four pack of deluxe wheel maskers is made of a heavy duty spun woven material that provides maximum protection and longevity. Fits up to 18" wheels.

Item #	Description	Quantity
ASTRO9004	Wheel Maskers (canvas) Fits up to 18" wheels	4 pack



REUSABLE WHEEL BAG MASKERS



KLINGSPOR's Krash Wrap - 36

36" wide self-adhering wrap covers cracked and broken windows on cars, SUVs, trucks, minivans and more. Protects vehicle or cab interior from exposure to rain, wind, snow, dirt, etc. Interior or exterior. 100 foot roll 3mil.

Easy Cover® Drape

This system combines the advantages of using Tesa® masking tapes with the advantages of using film as a masker. With its excellent properties in oven and IR drying, stretchability, resistance to wet sanding, ease of removal, lack of surface residue and no paint flaking. Add this to a masking paper border with a fold-out masking film attached and you've got a simple, effective masking system that offers 100% no bleed-through and less volume in waste. Film also has a static behavior for better adherence to the car body and is surface-treated so paint does not run.



Item #	Size
DRAPE4378-3-0	3 1/4' x 65 1/2'
DRAPE4378-4-0	6 1/2' x 46'
DRAPE4377	Dispenser



Body Fillers

KLING GOLD BODY FILLER - 0250

The KLINGSPOR Gold Body Filler is a stain-free, tack-free, non-bleeding, polyester-based Premium auto body filler that has excellent adhesion to galvanized steel, metal, aluminum, E-coat, SMC, fiberglass, and aged/cured paint and primer. Excellent for repairing auto body damages, holes, cracks, scratches, dents, rust-outs, and other surface imperfections. Designed to sand easily - even after a day of curing. Adheres to galvanized steel in only 20-30 minutes. Comes with a blue cream hardener. Super smooth formula with no need for finishing glaze. It's the safest time in the repair process while providing a premium finish.



EVERGOLD BODY FILLER - FILLER110



EverGold is a lightweight body filler designed for professional use to repair damaged body panels where increased productivity, decreased material costs, and premium results are desired. Its unique formula is designed to spread and level to a smooth finish, reducing sanding time to remove the heavy texture. It easily sands with 80 grit sandpaper, eliminating the need for coarse grits that can cause sand scratch swelling. EverGold contains the ZNX-7 formula that quickly provides superior adhesion to galvanized steel and aluminum, eliminating the risk of pulling back the featheredge. Over the years, Evercoat has invested heavily in technology and developed many leading products on the market. We have been first in producing high-build polyester primers, stain-free body fillers, glazing putties, lightweight pourable glazing putties, unique packaging, and time-saving body repair SOPs.

RAGE ULTRA - FILLER125



is the world's best sanding body filler. Its unparalleled sanding qualities are a result of the patented Ecoresin™. Its non-sag formula has excellent filling properties, while eliminating the need for finishing putty. Rage® Ultra contains ZNX-7® and is part of the Metalworks® system. Blue cream hardener included.

RAGE GOLD - FILLER122



has unsurpassed sanding qualities attributed to Hattonlite™, a unique ingredient, which reduces heat and friction created by aggressive sanding. RAGE® GOLD also contains ZNX-7™ for adhesion to galvanized steel and aluminum. Can be used for cosmetic fiberglass and composite repairs. Stain resistant for use with basecoat/clearcoat paints. Part of the METALWORKS® System. Blue cream hardener included.

Z-GRIP - FILLER282



is an advanced clog-free, lightweight body filler for today's high-tech metals. Formulated with ZNX-7® for superior adhesion to galvanized steel, bare steel and aluminum. Part of the METALWORKS® System that honors the OEM corrosion warranty. Contains Hattonlite™ for effortless sanding. Blue cream hardener included.

LITE-WEIGHT - FILLER156



Evercoat's #1 selling, clog free, lightweight body filler is a great value with its smooth spreading and easy sanding features. The non-clog formula adds greater value in sandpaper savings. Blue cream hardener included.

EVERGLASS FILLER - FILLER622 / 632



is a short strand multi-fiber reinforced body repair filler ideal for use on metal for finishing welded seams, rusted metal repairs, and repairing composites for filling holes in SMC/Fiberglass, and shattered fiberglass. Available in Gallon #622 (with 4oz. blue cream hardener) & Quart #632 (With .75oz blue cream hardener).

EVERCOAT FILLER FILLER141



is a super lightweight tack free auto body filler designed to reduce sandpaper clogging and sand to a fine finish. Blue cream hardener included.

HARDENER354 (BLUE) OR HARDENER358 (RED)

FIBER TECH - PUTTY633



is a unique repair filler formulated with a combination of Kevlar and high tech short and long strand fibers. It offers superior strength and adhesion for repairing galvanized steel, aluminum, SMC, rigid plastic body panels, i.e., ground effects, spoilers, running boards, fenders, hoods, etc. FIBER TECH Reinforced Filler is waterproof, which makes it ideal filling weld areas, panel bond seams and rust damage.

METALGLAZE - PUTTY416

is a two-part polyester finishing and blending putty. It can be used independently or intermixed with other METALWORKS® products to enhance the working properties for adapting to various temperatures and working conditions. It offers superior adhesion to galvanized metal, metal, aluminum, body filler, wood, fiberglass, catalyzed primers and aged/sanded OEM topcoats.





KLING GOLD PUTTY 440ML

The KLINGSPOR Gold Putty is a premium finishing glaze with superior adhesion to galvanized steel, aluminum, E-Coat, SMC, fiberglass, hand-cured primer and paint.

KLINGPLAST PUTTY PLASTIC REPAIR PUTTY 750ML

KLINGSPOR Gold KLING PLAST is a fast drying putty to repair any kind of plastic. Extremely flexible and creamy polyester putty. Easy to apply and perfect for any kind of plastic repair in body work — especially bumpers.



FIBERGLASS RESIN - FIBER498 / 499

Heavy, thixotropic formula that will not run or sag and will cure to a non-tacky surface. Wets out mat and cloth quickly. Can be filed, sanded or drilled. Impact resistant. Waterproof. Use with fiberglass mat, cloth or tape to rebuild and repair. Liquid hardener included.



EVER-GLAZE & SPOT PUTTY - PUTTY403

is a nitrocellulose, single component spot putty to fill sand scratches, file marks and other imperfections, not completely filled by the primer surfacer. Fast drying and easy sanding. Shrink-resistant formula. Dries smooth. Superior color holdout



PLASTIK HONEY - 1249

is a body filler thinner formulated to thin and enhance traditional polyester body fillers and polyester glazing putties. It can be added to Evercoat professional grade fillers and putties, as well as all competitive fillers and putties. Add a small quantity of Plastik Honey to the filler (prior to adding hardener) and continue to increase the amount until desired smoothness is achieved. NOTE: Plastik Honey is not recommended for use in Evercoat Quantum1™ 10:1 Single Step Repair Technology products, or Evercoat Ultra Products that contain EcoResin™



SEA-GLASS FIBERGLASS MAT - 940

100% fiberglass in a non-woven state. For bulk "build-up" when repairing holes and badly damaged areas. Also molds and builds for repair of curved surfaces in fiberglass objects. 1 sq. yd.



LIQUID HARDENER - 603

is the hardening agent for use with all polyester resins and gel coats. Plastic squeeze tube has graduated measure for mixing convenience. Use this Methyl Ethyl Ketone Peroxide catalyst according to the resin/gel coat label directions. Used with Slick Sand and Resin.

Adhesives & Seam Sealers



6030 PANEL BOND ADHESIVE

is a 30 minute two-component epoxy adhesive used for various body panels. It can be used to bond SMC to SMC, metal to metal and SMC to metal. Panel Bond-30 has corrosion-inhibiting properties that eliminates the need for epoxy primer or self-etch primers.




1728 DOOR SKIN ADHESIVE

is a 50 minute, multi-use glass sphere filled epoxy adhesive that provides a superior bond. The glass spheres in the product assist in obtaining the proper bond line thickness. It is suitable for all non-structural panel bonding applications of metal, aluminum, fiberglass and SMC. This product is ideal for door skins, and can also be used on fenders, quarter panels, cab corners, and small and medium sized panels.



1738 PANEL BOND ADHESIVE

is a 90 minute, multi-use glass sphere filled epoxy adhesive that provides a superior bond and seals that panel being bonded. The glass spheres in the product assist in obtaining the proper bond line thickness. #1738 is suitable for all non-structural bonding applications of metal, aluminum, fiberglass and SMC, including door skins, roof skins, fenders, quarter panels, cab corners, and medium and large sized panels.

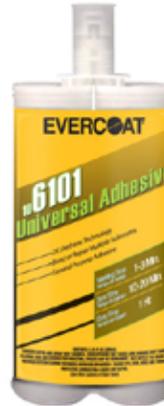

6101 UNIVERSAL ADHESIVE

is a two-component, general purpose urethane adhesive that provides speed, incredible strength and sandability. This fast setting adhesive is ideal for tab repairs, emblems and molding adhesive, as well as other quick-fix applications.



1458 UNIVERSAL QUICK ADHESIVE

is a fast-curing, urethane adhesive designed for plastic repairs. It is ideal for quickly repairing bumper tabs, brackets, headlight buckets and grills. It is an excellent choice for bonding backer panels, moldings, emblems and most small plastic, metal and aluminum parts. Universal Quick Adhesive is specially formulated for most automotive plastics, (including TPO, PP, PEI as well as metal, SMC, and fiberglass. This high strength adhesive is sandable and offers great featheredging characteristics with no pinholing.



1468-G PLASTO-MEND PLASTIC REPAIR

is an epoxy-based, easy-to-sand adhesive with superior feather edging qualities. 1468-6 was specially designed for basic cosmetic repairs of all types of plastics including: ABS, TPO, PP, PU, and others. 1468-6 is also excellent for repairs to body panels, grills, composite bumpers, headlamp housings, interior plastics and more.



6105 PLASTIC REPAIR 5

is a two-component epoxy repair adhesive that provides speed, Incredible strength and sandability. This fast setting epoxy simplifies the plastic repair process by eliminating substrate identification and adhesion promoter. Plastic Repair-S is ideal for fixing tears, nicks and gouges in plastic parts and other quick fix applications.



887 FAST URETHANE PLASTIC REPAIR

is a two-component urethane repair material that provides incredible strength and sandability. This urethane material is used for non-structural repairs on fiberglass, SMC, PUR, RIM, RRIM, PP, TPO, TPE, EPDM and other automotive plastics.





6022 HEAVY BODIED SEAM SEALER is a two-component epoxy seam sealer used to duplicate a variety of OEM seams. This non-sag seam sealer has excellent tooling characteristics and it is compatible with most topcoats



4198 CONTROL FLOW SEAM SEALER is a two-part, non-sagging epoxy that is ideal for sealing vertical and horizontal seams and joints on automobiles and trucks. It features a 15 -20 minute work time and is paintable in 45 minutes. Control Flow Seam Sealer is 100% solids so it will not shrink, harden or crack.

4122 URETHANE SEAM SEALER

is a one component polyurethane seam sealer that quickly cures to a permanent flexible sealant. Designed for sealing interior and exterior body joints. Can be painted in one-hour dependent on temperature and humidity. Duplicates OEM appearance



4157 ULTRA FLEX SEAM SEALER is a rapid curing, flexible seam sealer designed for all types of painted surfaces, bare metal and primed surfaces.



50
Size Compliant

4162 ULTRA FLEX BRUSHABLE SEAMSEALER

is a rapid curing, flexible seam sealer designed for all types of painted surfaces, bare metal and primed surfaces. It is resistant to weather exposure and temperature variations. Paintable and sandable. It remains flexible and seals wet or dry. Use to seal seams in floorpans, fire walls, truck seams, wheel wells, etc. Brush marks duplicate original factory finish. Skins in 5 minutes. Air dries in one hour.



4502 URETHANE WINDSHIELD ADHESIVE

is a single part moisture curing urethane adhesive designed to provide a strong bond to all windshield and backlight replacements. This product exhibits excellent adhesion to glass and pinchweld surfaces designed for use in a close cut-out method or tape installation. Urethane Windshield Adhesive passes FMVSS 208, 212, and 216



ASTRO DELUXE CAULKING GUN ASTRO4531

dispenses caulking, adhesives and sealant from a standard caulk cartridge or foil bag and it includes one plastic nozzle for use with bag. Specs are: Thrust ratio: 12:1. Weight: 2.15lbs



EVERCOAT6000 DUALMIX DISPENSER GUN

is a dispenser for 200 mL 2-part cartridges

TRANS1700N STATIC MIXING TIPS - 6pk

MIX817 MAXIM MIXING TIP #817 12pk Maxim™ Static Mixing Tips are designed to be used with Evercoat's Maxim™ two-component products



1700N STATIC MIXING TIPS


ACID DIP BRUSHES

ITEM# BRUSH ACID DIP BRUSHES



NOZZLE, NEEDLE, AIRCAP

ITEM# RP8311 NOZZLE NEEDLE AIRCAP

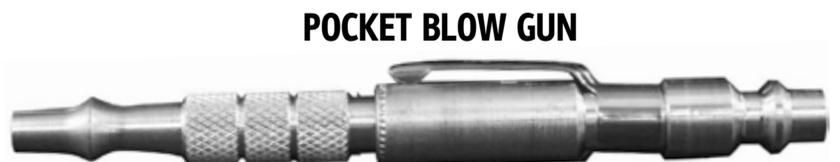

POCKET BLOW GUN

ITEM# DYNA94468 POCKET BLOW GUN

Primers

REG. #5

KLINGSPOR ULTRA GRIP PRIMER 710

is a 2 component DTM primer with excellent film building, and anti corrosion properties that sand easily. It can be used on a variety of automotive substrates . The 710 primer is easy to spray and levels to an almost texture-free surface.

Item #	Description	Unit
KAI-710	Primer - Gray	Gallon
KAI-7101	Activator	Quart



EURO CLASSIC DTM PRIMER

2K primer surfacer that can be applied directly to bare metal surfaces. It is quick drying and easy to sand wet or dry. It provides corrosion protection along with excellent fill and build properties. This unique primer provides improvements in productivity and reduces cycle times while providing significant labor and material savings. This primer can also be tinted using Transtar's "Star Shade" system for a better match .

Item #	Description	Unit
TRANS32-0231	Primer - Gray	Gallon
TRANS31-0261	Primer - White	Gallon
TRANS33-0271	Primer - Black	Gallon
TRANS40-0244	Activator	Quart
TRANS7327	Activator	1/2 Pint

2K KWIK PRIME 6441

is a two component primer surfacer that can be applied direct to metal surfaces. It is quick drying and easy to sand wet or dry. Kwik Prime provides corrosion protection along with excellent fill and build properties. This unique primer provides improvements in productivity and reduces cycle times while providing significant labor and material savings. Kwik Prime may be tinted using basecoat mixing toners.

Item #	Description	Unit
TRANS6441	Primer - Gray	Gallon
TRANS6454	Activator	Quart

REG. #1,2,3



EZ SAND URETHANE PRIMER 6401

is a premium lead/chrome free two component acrylic urethane primer surfacer . EZ Sand provides exceptional fill and build, yet provides a base which yields excellent top coat hold out, gloss and D.O.I. (Distinctness of Image). EZ Sand Primer sands easily wet or dry and can be directly top coated with alkyd enamels, acrylic enamels, lacquers, acrylic urethane enamels and basecoat clearcoat systems.

Item #	Description	Unit
TRANS6401	Primer - Gray	Gallon
TRANS6934	Activator	Quart

REG. #1,2,3

TRUE FINISH ACRYLIC URETHANE PRIMER 4951

is an acrylic urethane primer surfacer. It sands easily wet or dry and can be directly topcoated with alkyd enamels, acrylic enamels, lacquers, acrylic urethane enamels and base coat/clear coat systems.

Item #	Description	Unit
TRANS4951-01	Primer - Gray	Gallon
TRANS4911-04	Activator	Quart

REG. #1,2,3



SLICK SAND PRIMER 709

is a high solids, high build polyester primer surfacer ideally suited for filling most rough and uneven surfaces in one coat. It has excellent adhesion to fiberglass, SMC, body filler, epoxy primer and wood surfaces. Slick Sand is 50 state VOC compliant and provides an excellent foundation for any paint system but it is recommended to use a 2K sealer before top coating

Item #	Description	Unit
EVERCOAT709	Primer - Gray	Gallon

REG. #1,2,3

Primers



SUPER BUILD 4:1 PRIMER 730

is a two component primer surfacer that has exceptional filling capabilities and patented 4:1 mix ratio technology. It is ideal for holding down troublesome repairs on fiberglass and SMC. Super Build 4:1 passes 500 hours in salt spray tests (ASTMB117) and can be applied over properly sanded and cleaned bare metal. It is compatible with waterborne paint systems and VOC compliant. Must be catalyzed with 7334:1 Polyester Primer Catalyst only!

Item #	Description	Unit
EVERCOAT730	Primer - Gray	Gallon
EVERCOAT733	Catalyst	Quart

REG. #1,2,3

UNIVERSAL PRIMER 6001

is a fast drying, easy sanding lacquer primer surfacer, which has excellent adhesion and filling properties. It sands to a fine featheredge while providing excellent color hold out. Note: Universal Primer should be sealed if top coated with a urethane paint system.



Item #	Description	Unit
TRANS6001	Primer - Gray	Gallon

2K EPOXY PRIMER SEALER/GROUND COAT

is an exceptional lead and chromate free corrosion-resistant coating with excellent adhesion on a variety of properly prepared surfaces. 2K Epoxy Primer Sealer/ Groundcoat improves adhesion of body fillers and resists moisture damage caused by water permeation. If further reduced, this product may be used as a precoat or sealer/groundcoat prior to topcoating.



REG. #1,2,3

Item #	Description	Unit
TRANS6101	Primer/Sealer - White	Gallon
TRANS6131	Primer/Sealer - Gray	Gallon
TRANS6161	Primer/Sealer - Black	Gallon
TRANS6141	Activator	Gallon

KWIKSEAL 2K URETHANE SEALER

has been specifically formulated as a premium quality sealer to be used over a variety of substrates. Kwik Seal offers excellent adhesion to SMC, fiberglass, old paint finishes and all Transtar primers. Kwik Seal has excellent leveling and gloss hold out properties and is compatible with most basecoat/clearcoat and single stage systems. It is one of the most innovative products on the market today! Utilizing Transtar's "Star Shade" system, these colors can be intermixed at established ratios to create a wide variety of color offerings for optimum basecoat coverage.

Item #	Description	Unit
TRANS6221	Sealer- White	Gallon
TRANS6224	Sealer- White	Quart
TRANS6231	Sealer- Gray	Gallon
TRANS6234	Sealer- Gray	Quart
TRANS6241	Sealer- Black	Gallon
TRANS6244	Sealer- Black	Quart
TRANS6254	Sealer- White	Quart
TRANS6257	Sealer- White	1/2 Pint



REG. #1



SELF ETCHING 1K PRIMER 6184

is a ready to use one component metal etching primer. It provides excellent adhesion and protection against corrosion to bare metal, thereby eliminating the need for metal conditioning. It is recommended for use to treat bare metal or for application under primer surfacers.

Item #	Description	Unit
TRANS6183	Etch Primer - Olive	200z Aerosol
TRANS6184	Etch Primer - Olive	Quart
TRANS6793	Etch Primer - Gray	200z Aerosol

ADHESION PRIMER

This unique combination of adhesion promoter and primer provides significant labor and cost savings and now is available in a Low VOC version. It can save up to 2 hours of labor when prepping a raw or previously primed bumper or plastic part. Adhesion Primer is a single component non-sanding primer suitable for TPO & RIM substrates. It is fast drying and offers excellent adhesion. It is available in 3 colors to best suit your needs. No need for two steps, adhesion promoter and primer all in the same step! Clean surface with Aqua SCAT 2 1391/1394. Wipe dry with clean cloth.

Item #	Description	Unit
TRANS1074	White	Quart
TRANS1084	Gray	Quart
TRANS1094	Black	Quart



Clear Coats

KAI-820 KLINGSPOR ULTRA GUARD CLEAR

is formulated with European resins technology and provides a high gloss and ultimate long-term durability. It sprays and levels extremely well, giving a perfect O.E.M. appearance or custom results. Easy sanding and buffing makes the Ultra Guard Clear the Ultimate Clear user friendly. It can be applied in air dry or bake environments.

Item #	Description	Unit
KAI-820	Ultra Guard Clear	5 Liters
KAI-8201	Activator - Fast	2.5 Liters
KAI-8205	Activator - Slow	2.5 Liters

REG. #5



REG. #1

7021 EURO CLASSIC CLEARCOAT

is designed for applications requiring the ultimate finish appearance. This high solids clearcoat provides optimum flow and leveling, and imparts a glass-like finish. It has excellent flexibility and is resistant to stone chips and abrasions. Ideal for use over single stage or base/clear applications. May be used in air dry, down-draft, or force dry applications.

Item #	Description	Unit
TRANS7021	Euro Classic Clear	5 Liters
TRANS7086	Activator - Fast	2.5 Liters
TRANS7096	Activator - Slow	2.5 Liters

7211 EURO KWIK CLEARCOAT

is an acrylic urethane clearcoat that can be used with all solvent and waterborne basecoats. It is suitable for all automotive refinishing as well as trucks and equipment. With Euro Kwik Clearcoat a shop can spray clearcoat, buff/polish and deliver the vehicle in the same day!

Item #	Description	Unit
TRANS7211	Euro Classic Clear	5 Liters
TRANS6876	Activator - Fast	2.5 Liters
TRANS6896	Activator - Slow	2.5 Liters

REG. #1



REG. #1

6861 HI-GLOSS CLEARCOAT

is an acrylic urethane clearcoat formulated for higher temperatures and bake booths. It meets all current and proposed national VOC regulations. It can be used with all solvent and water based basecoats. It is suitable for all automotive refinishing as well as trucks and equipment.

Item #	Description	Unit
TRANS6861	Hi-GlossClear	Gallon



REG. #1

6841 KWIKGLOSS CLEARCOAT

is a fast drying acrylic urethane clearcoat. It can be used with all solvent and water based basecoats to provide ultimate productivity and gloss. Kwik Gloss is formulated for use with a complete line of activators for application over a wide range of job size sand temperatures. It is suitable for all automotive refinishing as well as trucks and equipment.

Item #	Description	Unit
TRANS6841	Kwik-Gloss Clear	Gallon



REG. #1

7761-MTR MAXIMUM TIME REDUCTION CLEARCOAT

is a fast drying clearcoat that provides the additional features of low overspray and super high gloss. This unique product improves production by maximizing vehicle throughput. The fast flash feature provides the benefit of less dust and dirt getting trapped in the finish, which means less labor expanded to buff or polish.

Item #	Description	Unit
TRANS7761-MTR	MAX Clear	Gallon



MATTE URETHANE CLEARCOAT

is designed to offer a matte gloss look as well as to duplicate low gloss OEM Finishes, while offering the UV protection and durability of a standard clear coat finish.

Item #	Description	Unit
TRANS20-0094	MATTE Clear	Gallon

6800 SERIES ACTIVATORS

Extra Solids Acrylic Urethane Clearcoat Activators are specifically designed for high productivity shops using Transtar Finish-Tech 6861, 6841, & 7761 Clearcoats to provide a long lasting high gloss finish. Activators are suitable for use in clearcoat applications over single stage topcoats and for base/clear applications (except lacquers).

- #6854 Lightning Activator is designed for spot & panel repairs and for use in cool/cold temperatures. It significantly accelerates flash and cure times. This product provides low overspray.
- #6874 Spot & Panel Activator is designed for use in temperatures between 65°-80°F (19°-27°C) or for spot & panel applications.
- #6894 Overall Activator is designed for use in temperatures between 75°-90°F (24°-32°C) or for large jobs which require longer open times.
- #6894HT HiTemp Activator is designed for use on larger jobs in temperatures above 90°F (32°F).



Item #	Description	Unit
Trans6854	Lightning Activator	Quart
Trans6874	Spot & Panel Activator	Quart
Trans6894	Overall Activator	Quart
Trans6894HT	Hi Temp Activator	Quart



CLEARSYSTEM™
ACTIVATORS are designed for use in select ClearSystem™ Clearcoats.

Item #	Description	Unit
Trans40-8044	Activator Fast	Quart
Trans40-8054	Activator Medium	Quart
Trans40-8064	Activator Slow	Quart

8121 MOTORCITY EURO CLEARCOAT

8121 MOTORCITY EURO CLEARCOAT is an acrylic urethane clearcoat that is suitable for all automotive refinishing as well as trucks and equipment. It can be used with all solvent and water based basecoats.



Item #	Description	Unit
TRANS8121	Euro Clear	5 Liters
TRANS8136	Activator - Spot & Panel	2.5 Liters
TRANS8146	Activator - Overall	2.5 Liters



4900 TRUE FINISH CLEARCOAT

is a two component, universal urethane clearcoat designed for spot and panel and overall finish jobs. It is fast-drying, easy to use and provides a durable finish with excellent gloss.

Item #	Description	Unit
TRANS4921-01	True Finish Clearcoat	Gallon
TRANS5901-04	Activator - Fast (Spot & Panel)	Quart
TRANS5902-04	Activator - Medium (Overall)	Quart
TRANS5903-04	Activator - Slow (Overall / Hi-Temp)	Quart

CLEARSYSTEM™ TOP SPEED CLEARCOAT

20-8031 20-8021 20-8011

is designed as part of the ClearSystem product line. It is a medium solids clear with ultra fast curing. It is designed to increase your production output.



URETHANE GRADE REDUCERS

are universal urethane grade reduce that can to be used in most primer and clearcoats.



Item #	Description	Unit
TRANS6701	Reducer - Fast	Gallon
TRANS6711	Reducer - Medium	Gallon
TRANS6721	Reducer - Slow	Gallon
TRANS6751	Reducer - Extra slow	Gallon

6417 KICKER ⁵⁰ State Compliant



Designed to accelerate the curing, dust, tack and tape times of Transtar Acrylic Urethane Primers and Clearcoats with no sacrifice of pot life. When Kicker is used according to the directions, it can save time and cost, by improving shop productivity.

6487 APPEARANCE IMPROVER ⁵⁰ State Compliant



Specially formulated for use in high temperatures and/or on extremely large refinish areas. 6487 will improve flow out and appearance of all Transtar Clearcoats used in conditions where temps exceed 90°F and/or large refinish areas where extended open times are required to allow adequate integration of overspray.

6737 FISHEYE REMOVER



An additive specifically formulated to help avoid and prevent fisheyes. This product can be used with all types of urethane and non-urethane 2K topcoats. Use for a smooth finish over surfaces that show evidence of fisheying usually due to silicone contaminant's.



9194 UNIVERSAL URETHANE FLEX ADDITIVE

Designed to increase flexibility, impact resistance, chip resistance, and UV protection in Transtar two component (2k) urethane products. Universal Urethane Flex Additive mixes easily and does not affect dry or cure times. It also increases the adhesion of coatings on plastic parts.



BLEND RITE KAI 280 REG. #5

Is a blend of premium solvents and resins designed to be used as a panel blender for 2K clearcoats and single stage urethane paint. Also to check color match and layout of metallic. It is compatible with most major clearcoat, base coat and single stage urethane systems.

MUL-TIE ADHESION PROMOTER

Transtar's Mul-TIE Adhesion Promoter greatly enhances the adhesion and durability of virtually all types of automotive finishes and a variety of substrates; including problem plastics, such as TPO and polypropylene. Mul-TIE can be used under primers on flexible and rigid plastic parts, as a tie-coat between fresh or existing primer and color (single stage or basecoat) and for painting aluminum or steel.

Item #	Description	Unit
TRANS1031	Mul-Tie	Gallon
TRANS1033	Mul-Tie	Aerosol
TRANS1034	Mul-Tie	Quart



Cleaners & Additives

REDUCERS & FINAL WIPE

Item #	Description
KAI-1390	EXTRA SLOW REDUCER URETHANE GRADE
KAI-1360	FAST URETHANE REDUCER
KAI-1370	MED URETHANE REDUCER
KAI-1380	SLOW URETHANE REDUCER
KAI-398	FINAL WIPE/ANTI STATIC CLEANER



REG. #5 6321 SCAT & SPEEDI SCAT WAX & 6311 GREASE REMOVER



is a specially formulated solvent blend for lifting and removing wax, silicones, grease, oil and other potential contaminant's from surfaces to be painted. Quickly dries to a residue free surface. Speedi SCAT is the ideal pre-paint prep product and can be used on virtually any substrate – metal, fiber-glass, plastic, painted finishes. *Reg # 1, 2

6081 1K SPEED SEALER is a ready-to-spray acrylic sealer with good holdout properties and excellent adhesion. This non-sanding sealer is ideal for spot and panel refinishing and is designed to provide excellent DOI under a wide range of topcoats. Speed Sealer can be applied over sanded factory primers on replacement parts and panels. This product is tintable with tint paste or basecoat.



50
State Compliant

REG. #1 9784 ACRY SOLVENT



adhesive cleaner quickly softens and removes adhesives, tar, grease, oil, body sealers, wax, undercoating overspray and silicones. Acry Solvent can also be used as a pre-paint cleaner and conditioner, it leaves no residue on the surface and is safe for use on automotive finishes when used as directed.

6311 & 6321 SCAT are a specially formulated solvent blend for lifting and removing wax, silicone, grease and oil and other potential contaminants from surfaces to be painted. Used primarily as a pre-paint cleaner and conditioner to remove wax and silicone, 6311 SCAT leaves no residue on the surface. 6321 SPEEDI SCAT dries quickly for a residue free surface. Speedi SCAT is the ideal pre-paint prep product and can be used on virtually any substrate - metal, fiberglass, plastic, painted finishes, etc.



1391/1394 AQUA SCAT2 DEGREASER



is a specially formulated, water-based degreaser that can be used on all plastics, metal and pre-painted parts. Its unique mix of alcohol, surfactants and water make it ideal for cleaning and degreasing plastics prior to painting or priming. Aqua SCAT 2 also reduces the amount of dust contact by neutralizing static charge. Compliant across North America.

6337 SCUFF PASTE products are used for paint preparation and blending. Use for surface preparation prior to painting to remove contaminants, silicone, grease and oils, tar and road film. Use on all areas to be painted, panels, jams, moldings, bumpers. Use in place of wet sanding and degreasing to save time and money. They help eliminate repaint problems such as fisheyes, craters, blisters and peeling when used properly.



50
State Compliant

BASECOAT BINDER, BALANCER AND REDUCER

Transtar CP Basecoat Binder and CP Basecoat Balancer have been formulated as comparable offerings for the most common major manufacturer's products. Since these are similar products, they are intended for use in a comparable manner as the color formula indicates. Transtar products have been developed to provide similar physical properties of their competitors including viscosity, solids, weight per gallon, and basecoat compatibility.

Item #	Description
7232-1D	CP BASECOAT BINDER
7233-1D	CP BASECOAT BALANCER



TRANSTAR BASECOAT BALANCER AND BINDER have been formulated as comparable offerings for the most common major manufacturer's products. Since these are similar products, they are intended for use in a comparable manner as the color formula indicates. Transtar products have been developed to provide similar physical properties of their competitors including viscosity, solids, weight per gallon, and basecoat compatibility.

Item #	Description
7150-1D	BASECOAT BALANCER
7175-1D	BASECOAT BINDER

*** SEE BACK PAGE FOR ENVIRONMENTAL COMPLIANCE MESSAGE**

TRANSTAR BASECOAT REDUCERS have been formulated as a comparable offering for use in Axalta's ChromaBase* and ChromaPremier* Basecoat* colors. These Basecoat Reducers will improve overall appearance for a smoother basecoat finish and better metallic flake control. Transtar's Basecoat Reducers are designed to assist cure and flash times and improve basecoat performance. They will also help with sand scratch swelling on sensitive substrates.



877-456-5566



EZY GUN CLEANER

Paint Gun Cleaner is a high pressure aerosol cleaner formulated to remove uncured urethane, polyester and water-borne paints and primers from spray gun internal and external parts. EZY is supplied with a nozzle and tube for cleaning internal inlets, tubes and ports. KAI-409 15.75 oz. can



1K SELF ETCHING PRIMER

Provides excellent protection against corrosion to bare metal, thereby eliminating the need for metal conditioning.

Reg # 1

Trans6183	Olive	20 oz. can
Trans6193	Black	20 oz. can
Trans6184		1 quart

50
State Compliant



JAMMIN' CLEAR

An excellent acrylic clearcoat designed for performing small spot and panel repairs. This product is exceptional for use on replacement parts.

TRANS6213

50
State Compliant
20 oz. can



MUL-TIE ADHESION PROMOTER

Mul-Tie Adhesion Promoter & Tie-Coat greatly enhances the adhesion, appearance and durability of virtually all types of finishes, even when applied over difficult types of plastics such as TPO and polypropylene.

TRANS1033

16 oz. can

50
State Compliant



TRIM BLACK

A tough, flexible polymer black satin coating designed to match blacked out window trim, plastic and rubber parts. It has excellent adhesion to urethane, rubber, steel, aluminum and stainless steel.

Trans4643	Matte	20 oz. can
Trans4653	Satin	20 oz. can
Trans4663	Gloss	20 oz. can

50
State Compliant



WELD THROUGH PRIMER

Weld Through Primer offers high resistance to salt and water, providing excellent corrosion protection to the weld area. It is quick drying and water-resistant after 15 minutes. It provides superior conductivity for welding applications and has minimal spatter during welding.

TRANS4353

16 oz. can



50
State Compliant

AMBER RUSTPROOFING

Designed for replacement panels or new car rustproofing and restores the repair of existing corrosion protection to original specifications found on the interior of fender and panel replacements. Reg # 5

TRANS60-4423

24 oz. can

50
State Compliant



TEXTURIZED COATING

For use over basecoats before clearcoating or for application over fully cured clearcoats for added chip resistance.

TRANS4303	WHITE	16 oz. can
TRANS4313	BLACK	16 oz. can
TRANS4323	CLEAR	16 oz. can

50
State Compliant



QUICK DRY RUBBERIZED UNDERCOAT

A flexible undercoating with outstanding adhesion and abrasion resistance. Excellent dry times with superior paintability and will not crack or chip.

TRANS60-4363F

24 oz. can

50
State Compliant



2 IN 1 PRIMERS

2 in 1 Primers are fast drying, provide superior fill and build, and are easy to sand, making them compatible with virtually all automotive paints.

Trans4603	Gray	20 oz. can
Trans4613	Black	20 oz. can
Trans4633	White	20 oz. can
Trans4623	Red	20 oz. can

50
State Compliant



ACRY SOLVENT

Acry Solvent Adhesive Cleaner quickly softens and removes adhesives, tar, grease, oil, body sealants, wax, undercoating over-spray and silicones. Safe for use on automotive finishes when used as directed.

*Reg #5

TRANS9783	24 oz. can
TRANS9784	15.75 oz. can



MELT AWAY EDGE BLENDER

A simple, accurate way to dissolve the edges of coatings (primer, sealer, or clearcoat) overspray. Melt Away increases efficiency by giving an invisible blend and soft edge to every repair.

TRANS6363 20 oz. can

50
State Compliant



GUIDE COAT

Provides a quick method to find low spots on body filler, primer, glazing putties and other repair components.

TRANS9183 20 oz. can

50
State Compliant



DTM eCOAT

are direct to metal coatings that duplicate the color and gloss of factory e-coat colors. These coatings are designed for easy and convenient application to bare and coated metal and aluminum parts. They prevent rust while providing a smooth base for topcoat application on metals.


TRANS4743	light green
TRANS4733	white
TRANS4713	black



CORROSION PROTECTION NOZZLE KIT

The Corrosion Protection Nozzle Kit is designed to rustproof and undercoat any hard to reach places such as inside frame rails and door skins. Kit contains two 36" tubes with 360° tip, one 36" tube, two short tubes and six extra aerosol buttons.

TRANS4471

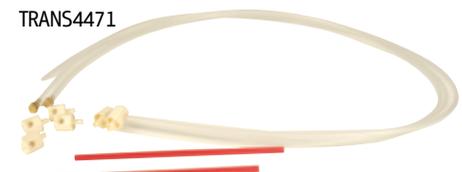

* see back page FOR ENVIRONMENTAL COMPLIANCE MESSAGE

www.KlingsporAutobody.com



MINI SNAP-BLADE KNIFE



Miniblade114-58

SAFETY SCRAPE MINISCRAPER BLADES

The razors have two sides with different thickness. Mini scraper holds the blade safely.



MS204 Miniscraper Replacement blades (20 per bag)
MS147K Yellow Miniscraper with 5 yellow blades

SINGLE EDGE NO. 12 RAZOR BLADES



BLADE111-12 #12 Blades. 100qty.




#128PL SOUND DAMPENING PAD

Reduces noise and vibration in all types of vehicles. Can be stacked in multiple layers to build depth of dampening. Enhances car audio system's quality & amplifying power. Textured pad surface matches OEM applications.

#128PL 6 pads per pack

MIX BOARDS

Here's a convenient and handy tool for mixing. Mix Boards with disposable sheets. Each masonite board has a strap on the back to hold it firmly to your hand and has 100 disposable non-porous sheets padded on the front. Simply mix on the top sheet, then remove it for the next mixing.



Back



MIX BOARD 1800



BARGAIN BOX OF RAGS

This ready-to-go 4.5 lb. box full of soft white cloths are pre-washed so they are lint free and clean of any contaminant's. Every "rag" is a generous size and can be cut into smaller pieces. They're also great for a wiping cloth or a clean-up rag.

BC33010

EVERCOAT MIXING BOARDS

EVERCOAT155 ACRYLIC MIXING BOARD



11 PC. FASTENER AND MOLDING REMOVAL TOOL SET ASTRO4524

For use on internal and external vehicle molding and trim fasteners.

- Plastic construction of tools prevents scratching and damage to vehicle paint, leather, chrome, etc.



- Set includes: 6" Remover - Wide Type, 7" Remover - Pull Type, 8" Remover - Handy Type, 7" Remover - Narrow Type, 8.5" Upholstery Clip Remover, 8" Angled Clip Panel Remover, 8" Flat Clip Panel Remover, 8" Panel Remover, 8" Sharp Panel Remover, 8" Clip Panel Remover and 8" Straight Panel Remover



STEEL SPREADERS

SPREADER1101 4" (3 pack)

PLASTIC SPREADERS

Get more work finished in less time. Available in 3" x 4" and 3" x 5" sizes.

H10-07 3" X 4" Plastic Spreaders

H10-09 3" X 5" Plastic Spreaders



CLAY MAGIC® SURFACE PREPARATION BAR

Make your finish as smooth as glass; while removing harmful surface contaminants such as paint overspray, tree sap, bug residue, and industrial fallout. It's clearcoat safe and can be used on paint, chrome, glass and fiberglass!

CLAY1200 RED/MEDIUM
CLAY2200 BLUE/FINE



ABRASER RUST REMOVER 2-PACK

Simply use the block like an eraser, rubbing firmly on the surface. Can be used both wet or dry. Two pack includes: medium and fine grits

ABS02 ABRASER SANDFLEX STICK GRIT 120 & 240





K-LINER BEDLINER KIT AND SPRAY GUN

- 10 times tougher than other bedliners
- Can be applied onto almost any surface, including: metal, plastic, wood and concrete
- Easy to apply; Variety of finishes
- Designed to cover an average truck bed
- The only limit is your imagination! black or tintable paint choices



CUPRAN® SPECIAL HAND CLEANER

A highly skin compatible solvent is used to help Cupran® Special break down dried-on paints, adhesives and urethanes. Unlike competitive products that use pumice as "friction" to remove paint, Cupran® Special breaks down the paint, adhesives and urethanes by employing a superior solvent and using a safe scrubber (walnut shells) thus not damaging skin in the process. Cupran® Special also uses a very highly specialized "super absorbent" to encapsulate contaminants on the skin, lifting them off, thus allowing the product to work effectively.

KRESTO® HAND CLEANER

A skin compatible solvent/detergent is used versus unknown petroleum based and/or organic based "d'limonene" (better known as "Orange" or "Citrus") solvent. The unique formula of Kresto® helps create a closer to neutral pH value to the skin, unlike competition. We use very skin compatible and "environmentally friendly" natural walnut shell scrubber versus our competitors harsh volcanic rock or "sand-like" scrubbers (such as plastic and pumice) which cause micro-abrasions to the skin.



STOKO® DISPENSER

This convenient unit will easily dispense a portion of your desired hand cleaner for quick clean-up and less mess.

Item #	Description	Size
8187406	Cupran Special Paint Remover for Hands	2000ml
8704506	Kresto Extra-Heavy Duty Hand Cleaner	2000ml
8980801	Dispenser	
93014	Wipe	

ALL PURPOSE WIPER AND TOWEL PACKS

This is a high quality 4-ply towel excellent for wiping spills, soaking up oil, machine and tool wiping, wiping glass, dry wiping, with solvents and panel prepping.

Item#	Description
WIPE93014	250 COUNT PREP WIPE
WIPE86870	300 SHEETS CHAMPION SELECT
WIPE1539	MULTIPURPOSE INDUSTRIAL WIPES
450337	200-COUNT SHOP MAX WIPES



TACK CLOTHS

Here is your tack rag solution. We carry 3 different tack rags from Gerson to meet your needs. All of the below tack rags are wax & silicone free, compatible with all paints & are approved by leading Auto, Marine, Aerospace and Electronics manufacturers. So whether you are looking for the new TEK prep or the standard base/clear tack rag we have you covered.

- TEK prep is made from a lint free continuous-filament knit polyester, with stitched edges that does not shed fibers or generate lint from rubbing and the wave knitted fabric picks up all particulates. TEK prep has a non-transferring formulation that is a dry tack that glides smoothly for a very long life.
- Blend prep is made from a Blue synthetic non-woven material, Low tack formulation to remove surface particles without harmful residues.
- 2000 Basecoat/Clear coat is made from a Blue cotton standard mesh material, Low tack formulation to remove surface particles without harmful residues.

Item #	Cloth Size	Description	Qty per box
TACK020009C	18" x 18"	TEK PREP	12
TACK020008C	9" x 18"	BLEND PREP	12
TACK020002B	20" x 16"	BASECOAT/CLEARCOAT	12

www.KlingsporAutobody.com



Buffing & Polishing

DYNABRADE POLISHER - EB3

Features & Benefits:

- Tool includes Hook-Faced backup pad
- Tactile, thermoplastic grip
- 2,700 rpm with 3/8"-24 male spindle, rear exhaust
- Rotational rear exhaust directs cold air away from operator
- Includes safety-lock lever



BUFFING, COMPOUNDS & POLISHES

TRANSTAR COMPOUNDS AND POLISHES

SUPER KUT COMPOUND

Ultimate Finish System Super Kut Compound is an aggressive compound that removes scratches and imperfections in difficult substrates and coatings. It produces a high gloss and shine on gel coat, hard-baked coatings, scratch resistant coatings, etc. Safe for use on all paints.



TRANS5321 GALLON
TRANS5324 QUART

AUTO MAGIC® COMPOUNDS AND POLISHES

AMPC-1

PC-1™, Extra Cut Compound is an advanced, extra cut compound that deliver a high gloss and low-dust finish for step one. It can be used in multiple paint correction scenarios and is versatile with industry equipment*, rapidly taking out 1500 grit sand scratches and finer.



501201 1 LITER BOTTLE

CUTTING COMPOUND

Ultimate Finish System™ Cutting Compound features innovative, optimum-cut technology that levels 1200 grit or finer sand scratches and imperfections without scratching the paint. Safe on all paints, Cutting Compound produces a high gloss and shine on hard-baked coatings, scratch resistant coatings, gel coat and more.



TRANS5361 Gallon
TRANS5364 Quart

AMPC-2

PC-2™ Advanced Diminishing Compound is an advanced, diminishing compound that works remarkably fast, removing any residue and possible swirl marks left behind from step one. It also rapidly removes 3000 grit sand scratches and other paint imperfections while producing rich color depth, high-gloss and a swirl-free finish.



501202 1 LITER BOTTLE

TRI-CUT 2 COMPOUND

Ultimate Finish System Tri-Cut is designed to offer 1 product for three uses. 1) to remove grade 1200 grit and finer sand scratches with a wool compounding pad and an air or electric buffer (1500-2000 RPM.), 2) for 1500 and finer imperfections use a Foam Cutting Pad at (1200-1750 RPM), and 3) finish to desired gloss with a Foam Polishing at (1000-1120 RPM's). Safe for use on all paints.



TRANS5331 Gallon
TRANS5334 Quart


AMPC-3

PC-3™ Final Finish is a final finishing polish that revives the original beauty to all painted surfaces. PC-3 easily adds intense color depth with a spectacular high-gloss finish.



501203 1 LITER BOTTLE

POLISHING PADS

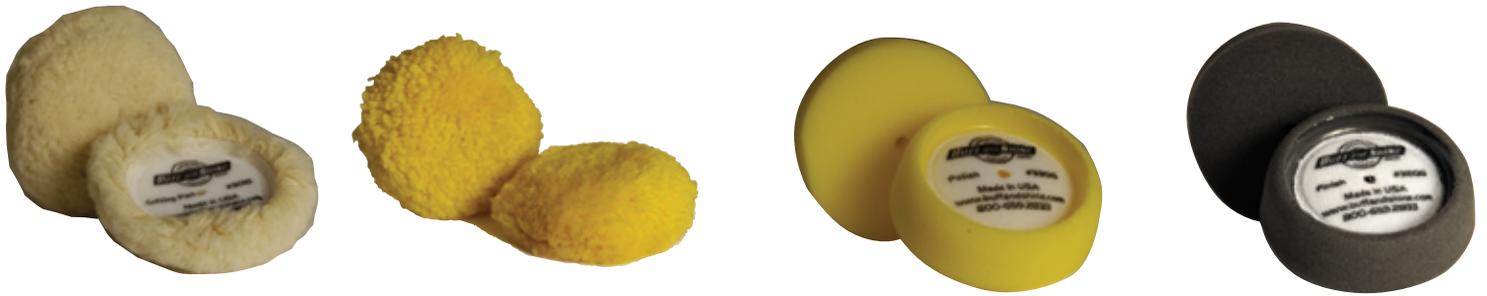

Item#	301G	301GY	330G	320G
Size	3"	3"	3"	3"
Type	White Twisted	Yellow	Yellow Foam	Black Foam
Blend	100% Wool	Wool Blend	Compound/Polish	Finish/Polish
Ply	4	4	n/a	n/a
Per Pack	(2pk)	(2pk)	(2pk)	(2pk)

TP4 – 3" KIT Includes: 1 each of 301G, 301GY, 320G, 330G, 3" backing pad + 2 adaptors, 1 for drill + 1 for a pneumatic polisher.



Item#	7503G	899WG	830WG	820WG	852WG
Size	7"	7"	7"	7"	7"
Type	100% Grip Wool	White Convoluted	Yellow Convoluted	Black Convoluted	Light Blue
Blend	Compound Pad	Course Cutting	Medium Cutting	Finishing	Ultra Finish
Ply	4	N/A	N/A	N/A	N/A



Item#	658Y	752R	830RH	820RH
Size	6" x 5/8-11 thread	6"	6"	6"
Type	n/a	Twisted Wool Pad	Yellow Hex	Black Hex
Blend	Backing Pad	w/centering ring	Medium Cutting w/centering ring	Finishing w/centering ring
Ply	4	n/a	n/a	n/a

TP1R KIT – Kit Includes: 1 each of 820RH, 830RH, 752R & a 658Y Backing Pad

POLISHING COMPOUNDS

Polish compounds	Treated sisal	Natural sisal	Mill treated cotton	Denim	Canvas	Natural cotton	Flannel
KPC2U	●	●	●				
KPC3U			●	●	●		
KPC4S				●	●	●	
KPC5S						●	●
KPC4SF			●	●	●	●	
	● Recommended						

KPC2U- 20% Color 80% cut • KPC3U- 50% Color 50% cut • KPC4S- 70% Color 30% cut • KPC4SF- 80% Color 20% Cut • KPC5S- 100% Color

KPC2U Product Features / Benefits:

This our heavy cut compound, offer 80% cut and 20% of luster, ideal for stainless steel, carbon steel and hard aluminum, for pre-polish process, this remove some light scratches from previous sanding **KPC2U - HEAVY CUT GREEN**

KPC3U Product Features / Benefits:

Medium cut compound, offer 50% cut and 50% of luster, ideal for start polishing non-ferrous metals, very good removing some minor scratches from previous sanding, suitable for use with bias airway buff, cotton & denim wheels **KPC3U - MEDIUM CUT WHITE**

KPC4S Product Features / Benefits:

For mirror finishing process, provide a great shine, 20% cut and 80% luster, this is the final complement after pre-polish with either KCP2 or KCP3, used with treated and non-treated airway buff wheel, sewing cotton wheels or felt fabric Offer shine finishing for all metal in general **KPC4S - UNIVERSAL FINISHING RED**

KPC5S Product Features / Benefits:

Compound for a high gloss, extra shine for metal in general, excellent for jewelry, some plastics and paint, mostly used with flannel, cotton and felt **KPC5S - UNIVERSAL FINAL FINISH YELLOW**

KPC4SF Product Features / Benefits:

It is suitable for mirror polishing on all kinds of metal surfaces especially stainless steel in manual or automatic polishing processes. Also in Titanium and chrome very good results **KPC4SF - SUPER FINISH BLUE**



FELT PRODUCTS

2" x 1" x 1/4"	FBANAFM-050025
4-1/4" x 4" x 5/8"-11	FBBNAFM-110100
4-1/4" x 4" x 3/4" keyway	FBCNAFM-110100
2" QRC	QRCF1200 Per Box of 25
3" QRC	QRCF1300 Per Box of 25
4-1/2" x 7/8 Felt Polishing Disc	FPD60115022

Respiratory Protection



NEW FULL FACE RESPIRATOR SP9955

KLINGSPOR is pleased to introduce a new full face respirator from the trusted people at Gerson – true leaders in respirators and breathing protection. This new respirator offers a one size fits all design with a wraparound lens for optimal field of vision and is made using a comfortable elastomeric material – ideal for long term use. The full size nose cup reduces the chances of fogging common with other full face respirators. All cartridges are interchangeable with Gerson half mask respirators. Mask includes a free lanyard!

SP9200
SP9300



REUSABLE HALF MASK RESPIRATOR SP9200- M SP9300-L

This dual cartridge half mask respirator is made of comfortable, non-irritating TPE and elastic strap and cradle suspension for comfortable wear. The construction with exhalation valves and two filtering cartridges offers very low breathing resistance while the low profile design allows for a wide field of vision and room for eyewear. Their economical price allows for single use applications yet they can be used over and over again. Used in conjunction with the multi-contaminant filters, our half mask respirators will combat either organic gases and vapors or acidic gases and vapors, based on which cartridge is chosen, plus all solids and particulates.




SP8211
SP8311



DISPOSABLE HALF MASK RESPIRATOR SP8211M SP8311-L

Our maintenance-free respirator comes completely assembled with organic vapor cartridges and P95 particulate replaceable pre-filters. This NIOSH approved respirator offers state-of-the-art design, performance and comfort. It features a soft, lightweight elastomeric facepiece, and cradle suspension with easy-adjust headstraps that facilitate a comfortable and proper fit. The low, profile, swept-back design provides a greater field of vision and allows workers to use glasses or goggles. The P Series filters can be used with oil or solid particulates.



P95 Organic Vapor/Acid Gas Cartridges*
SPG03

- Ready to use. No cartridges to replace and no spare parts to stock. Simplifies your inventory requirements.
- Reduces the record keeping necessary for OSHA compliance regarding maintenance and cleaning.
- Available in Medium and Large.



N95 Particulate
Pre-Filter - sold 10 per pack*
SPG95P



Filter
Retainer
for use with
N95 Particulate
Pre-Filter*
SP172

***Add on item to SPG03
must be used with
SP172**

P95 Organic Vapor/Acid Gas Cartridges	sold 2 per pack	SPG03
P100 Particulate Cartridges	sold 2 per pack	SPG70
PANCAKE P100 OV		SPXP100
N95 Particulate Pre-Filter - sold 10 per pack		SPG95P
Filter Retainer for use with N95 Particulate Pre-Filter		SP172



SP1740/SP1940



SP1730

NIOSH APPROVED N95 PARTICULATE RESPIRATORS

All of these particulate respirators are NIOSH approved and conform to NIOSH 42 CFR standard as N95 class. What does that mean to you? The filter medium has an efficiency of at least 95% against airborne particulates 0.3 microns in size that are free of oils - dusts, metal fumes, micro-organisms and non-oil containing mists. These masks are excellent for many welding exposure situations involving fumes. The soft inner facepiece layer of these is non-irritating and comfortable to wear for long periods of time. The shell doesn't absorb as much moisture from exhaled breath as other masks. The respirators maintain low breathing resistance all day long. The New SP1940 particulate respirator offers the same level of protection, but may be used in the presence of oils and/or oil mists.

N95 Particulate Respirator	SP1730	N95 Particulate Respirator w/Welding Mask	SP1940
N95 Particulate Respirator w/Valve	SP1740	Nuisance Dust Mask	SP1501

Hands, Head, Face and Body Protection

DISPOSABLE PROTECTIVE GLOVES



KLINGSPOR is pleased to offer disposable protective gloves. Almost every manufacturing facility has applications where latex and/or nitrile gloves are used. They may be used directly in the manufacturing process or simply in maintenance operations. Three versions of our KLINGSPOR gloves are available - regular powder-free latex, 5 mil powder-free blue nitrile and 6 mil powder-free black nitrile.

POWDER FREE LATEX GLOVE	ITEM #	QTY PER BOX
LARGE	LATEX17002	100
EXTRA LARGE	LATEX17003	100
BLUE NITRILE GLOVE - 5 MIL POWDER FREE		
LARGE	NITRILE18002	100
EXTRA LARGE	NITRILE18003	100
BLACK NITRILE GLOVE 6 MIL POWDER FREE		
LARGE	NITRILE66518	100
XLARGE	NITRILE66519	100
XXLARGE	NITRILE66520	100
THICKSTER (SAS) 14 MIL LATEX POWDER FREE EXAMINATION GLOVE		
MEDIUM	LATEX6602	50
LARGE	LATEX6603	50
EXTRA LARGE	LATEX6604	50

ASTRO GRIP GLOVES



ASTRO 6 MIL - 100 PER BOX

MEDIUM	NITRILE66472GRIP
LARGE	NITRILE66473GRIP
X-LARGE	NITRILE66474GRIP
XX-LARGE	NITRILE66475GRIP



Head and Face

A. HEADGEAR WITH FACESHIELD

Convenient headgear with faceshield combination is an easy all-in-one way to protect the entire face and front portion of the head when flying debris comes into play. The ratchet adjustment offers the best possible fit. The polycarbonate faceshield is simple to detach for quick replacement when worn or scratched.

Headgear with Faceshield Item #SPHG400



B. SPRAY SOCKS

Our premium spray socks are longer, wider, and softer than the competition. This spray sock is the professional painter's choice and the most comfortable spray sock made.

Item #SPRAYSOCK



C. DISPOSABLE NONWOVEN POLYPROPYLENE COVERALL

This coverall protects from harmful paint overspray, sanding dust, dirt, grease, grime, and pesticides. It's made from polypropylene non-woven material that's lightweight and comfortable. Elastic on wrists and ankles create an even barrier of protection; plus, it's washable so you can reuse.

COVERALL Large	Item #PROTECTIVESUITL
COVERALL X-Large	Item #PROTECTIVESUITXL
COVERALL XX-Large	Item #PROTECTIVESUITXXL
REUSABLE NYLON HOODED SUIT Large	Item #SUIT510056
REUSABLE NYLON HOODED SUIT X-Large	Item #SUIT510058
REUSABLE NYLON HOODED SUIT XX-Large	Item #SUIT510060
REUSABLE NYLON HOODED SUIT XXX-Large	Item #SUIT510061



Eye & Hearing Protection



NSX TURBO

- High-impact polycarbonate lens
- 99.9% UV Protection
- Mono lens design
- Scratch resistant coating on lenses
- Lightweight wrap-around lens
- Non-slip temples
- Available in 5 lens colors
- Meets ANSI Z87.1-2015

Clear Lens	SP5330
Amber Lens	SP5332
Light Blue Lens	SP5333
Indoor/Outdoor Mirror	SP5334



NSX

- High-impact polycarbonate lens
- 99.9% UV Protection
- Single lens design
- Anti-fog and scratch resistant coating on lenses
- Lightweight wrap-around lens
- Meets ANSI Z87.1-2015

Clear Lens	SP5340
Yellow Lens	SP5341
Grey Lens	SP5343
Indoor/Outdoor Lens	SP5345



DIAMOND BACKS

- High-Impact Polycarbonate Lenses
- 99.9% UV Protection
- Anti-fog and Scratch Resistant Coating on Lenses
- Wrap-Around Design Hugs the Face
- Non-Slip Nose Piece
- Non-Slip Temples

Clear Lens	SP0100
Grey Lens	SP0101
Smoke Lens	SP0103



WORKER BEES

- Impact-resistant polycarbonate lens
- 99.9% UV Protection
- Scratch-resistant coating on lens
- Fits over most prescription glasses
- Meets ANSI Z87.1-2015 and CSA Z94.3

Chief Clear Lens	SP5120
------------------	--------

Leather and Cut Resistant Gloves



GOAT SKIN TIG WELDING GLOVE

This glove has the strongest tensile strength and excellent tactile sensitivity. Best combination of flexibility and comfort. The SP4840 is an unlined Mig/Tig glove with a 5" russet split cowskin cuff for additional safety. It is sewn with DuPont™ Kevlar®, has a straight thumb and a self hem sewn cuff.



TIG WELDING Welding Glove

Medium SP4840M
Large SP4840L

DRIVER'S GLOVE

SP3204 Premium Grain Palm & Split Back, Keystone Thumb, DuPont™ Kevlar® Sewn Characteristics include a good balance between abrasion resistance, dexterity, durability and comfort. The 3204 drivers gloves feature; premium cow grain leather palm, brown split leather back, sewn with Dupont™ Kevlar®,shirred elastic back, rolled hemmed, and a keystone thumb pattern.



DRIVER'S GLOVE

Medium SP3204M
Large SP3204L
X-Large SP3204XL

BLUE LEATHER WELDING GLOVES

Blue regular split shoulder leather with a full sock jersey lining, cotton drill cuff lining and reinforced palm.



BLUE LEATHER Welding Glove

SP4501



ULTRA TECH CUT PRO

10 Gauge Kevlar®/Fiberglass/Stainless Steel Shell, Black PU Coated Palm. Level 4 cut resistant. Polyurethane palm and fingers for additional grip and abrasion resistance

Large SP93891PUL



SPRAY GUNS & ACCESSORIES

Transtar HVLP professional spray guns are designed to produce high quality finishes in all applications. The spray guns are equipped with stainless steel fluid tips and needles for use with all types of coatings.

Item #	Description
TRANS6613	HVLP Gun (1.3mm)
TRANS6614	HVLP Gun (1.4mm)
TRANS6617	HVLP Gun (1.7mm)
TRANS6618	Touch-Up HVLP Spray Gun
TRANS6600	Spray Gun Rebuild Kit
TRANS6601	Touch Up Spray Gun Rebuild Kit
TRANS6603	1.3 Needle Nozzle Rebuild Kit
TRANS6604	1.4 Needle Nozzle Rebuild Kit
TRANS6607	1.7 Needle Nozzle Rebuild Kit
TRANS6608	1.0 Needle Nozzle Rebuild Kit
TRANS6621	HVLP AR-200 air Regulator 1/4"
TRANS6630	1000cc Aluminum Spray Cup
TRANS6640	1000cc Aluminum Spray Cup Lid
TRANS6643	Cup Lid Seal for 6613 / 6614 / 6617
TRANS6644	Cup Lid Seal for 6618
TRANS6632	125cc Aluminum Spray Cup with Lid



HVLP SPRAY GUN

Designed to provide equal atomization and particle size for all kinds of surface painting. Stainless steel needle and nozzle accommodate a variety of coating. Precise air cap set. Lightweight, ergonomic design and easy trigger pivot reduces operating fatigue.



Item #	Description
KAISP-PG-US	YELLOW PRIMER/GUN 1.4MM/2.2MM
KAISP-A604	HVLP SP/GUN 1.3MM 4.1-4.5 US /
KAISP-A605	HLVP SP/GUN 1.3 5.5 US / 400CC



TEKNA

Item #	Description
DT704198	TEKNA CLEARCOAT SPRAY GUN - UNCUPPED - 1.2, 1.3, AND 1.4MM
DTL03893	TEKNA BASECOAT SPRAY GUN - UNCUPPED - 1.3, 1.4MM
DT704175	TEKNA PRIMER SPRAYGUN - 900CC CUP - 1.8, 2.0MM
DTL03517	TEKNA PROLITE SPRAY GUN - UNCUPPED - 1.3, 1.4, AND 1.5MM
DTL03567	TEKNA PROLITESPRAYGUN - UNCUPPED - 1.2, 1.3, AND 1.4MM

DEVILBISS

Item #	Description
D803485	STARTINGLINE PRIMER PACK (2 GUN SET)

ACCESSORIES

Item #	Description
DT702516	TEKNA 900CC ALUMINUM CUP
TRANS6630	TRANSTAR 1000CC ALUMINUM CUP
TRANS6640	TRANS600CC ALUMINUM CUP
MIXTIP-LARGE	
MIXTIP-SMALL	

TRANSTAR

Item #	Description
TRANS6613	TRANSTAR HVLP SPRAY GUN -1.3MM
TRANS6614	TRANSTAR HVLP SPRAY GUN -1.4MM
TRANS6617	TRANSTAR HVLP SPRAY GUN -1.7MM
TRANS6618	TRANSTAR HVLP TOUCH-UP SPRAY GUN -1.0MM





DISPOSABLE SPRAY GUN FILTER

Disposable compact air filter removes moisture and impurities from airlines before it reached the spray gun. The super sensitive filter will effectively remove oil, aerosols, smoke, condensed moisture and virtually all solid particles.

MOTOR00112 Spray Gun Filter (Pack of 2)



KLINGSPOR MIXING CUPS

Available in quarts pints and lids that fit both sizes.

MIXCUP	QUART
MIXCUP-PT	PINT
PINT-QT	QUART LID
MIXCUP-PT-LD	PINT LID

PAINT BOOTH INTAKE FILTERS



Item Number	Description	Qty
VIL6901010	Andreae Filter 36" x 30"	1 per box
VIL6901489	20" x 20" Winair Intake	50 per box
VIL73074904	20" x 20" Standard Exhaust Filter	20 per box

THE PREVAL SPRAY GUN

This versatile, economical solution is a perfect complement to your present spray equipment. It proves its worth every day with its economy, ease of use and superior performance.

- Saves time and money... assures professional results every time
- Portable and disposable. Spray up to 16 oz.
- Economical, easy to use
- Get perfect color matching - using your own paints
- No wires or hoses to get in the way.

PREVAL267	Power Spray Unit & Reusable Container
PREVAL268	Power Spray Unit
PREVAL269	Reusable Product Container



METAL PAINT CANS

Item#	Description	Qty
CAN-608	Gallon Can w/Lid - Bway	34/case
CAN-609	Pint Can w/Lid - Bway	50/case
CAN-639	Quart Can w/Lid - Bway	56/case



MASTER SPRAY GUN CLEANING KIT

7 Piece Micro Needle Set With Handle 5 Piece Precision Mini Brush Set With Split Ring Holder 2 Piece End Brush Set With Handle Power Brass Pick-Up Tube Brush 12" Pick Up Tube Brush

ASTRO4544 Gun Cleaning Kit



PANEL STAND 557012

Lightweight panel stand with 300lbs. capacity. Bumper extension bar can easily be adjusted for any position. Great for working on bumpers and other automotive parts.

SPECIFICATIONS:

Maximum Capacity: 300lbs Adjustable Height: 34" to 47" High
 Stand Dimensions in Completely Folded Position: 49 1/2" H x 23 1/2" W x 6" D
 Maximum Stand Dimensions with Extension Bars Fully Extended:
 - Stand Adjusted to Maximum Height: Max. Height: 68" H / Max. Width: 65" W
 - Stand Adjusted to Minimum Height: Max. Height: 48" H / Max. Width 85" W
 Steel Tubing Construction with 1 1/2" (32mm) O.D. Round Tubing and 1-3/16" (30mm) O.D. Square Tubing
 Weight: 18.7lbs

PORTABLE WORK ASTRO STAND

The Astro 557003 500 Pound Capacity Portable Work Stand is designed for shops where space is an issue. They fold and are light enough to hang on a wall or store in a small space when not in use. They will hold up to 500 Lbs making this a must for all kinds of environments. Range of use includes hobbyist, industrial, mechanical, manufacturing and body shops.



EVERCOAT DIRT PIC

A unique tool crafted of surgical stainless steel and aluminum. Designed for the removal of foreign particles and bugs from a wet paint film.

EVERCOAT8001 Dirt Pic

CHEESE GRATERS

10" half-round convex blade used for faster stock removal and shaping curved surfaces. Ideal for work on fiberglass and removing filler (for cars and boats).

CHEESEGRATER295-12



DeVilbiss



Model Number	Description	Qty
Paint Guns		
D802342	HVLP 2 Gun Set (PAINT & TOUCH UP)	1
D803485	HVLP Primer Pack (2 gun primer pack)	1
Disposable Lids and Liners		
DPC-600	34 oz./1000 ml Disposable Cup/Lid	32
DPC-601	24 oz./710 ml Disposable Cup/Lid	32
DPC-602	9 oz./265 ml Disposable Cup/Lid	32
DPC-503-K24	3 oz. Disposable Cup/Lid	24
Reusable sleeve/Lid		
DPC-607	9 FL. oz./265 ml Reusable sleeve/lid	2
DPC-606	24 FL. oz./710 ml Reusable sleeve/lid	2
DPC-608	34 FL. oz./1000 ml Reusable sleeve/lid	2
Disk Filters and Barrel Filters		
DPC-42-K24	24 oz./34 oz 125 Micron Disk filter	24
DPC-66-K24	24 oz./34 oz 200 Micron Disk filter	24
DPC-65-K24	9 oz. 125 Micron Disk filter	24
DPC-67-K24	9 oz. 200 Micron Disk filter	24
DPC-27-K10	Barrel Filter 200 Micron (course)	10
DPC-17-K10	Barrel Filter 300 Micron (fine)	10
DPC-14-K10	Barrel Filter 600 Micron (very fine)	10
Measuring Guides		
DPC-39-K10	9 oz. Measuring Guide	10
DPC-35-K10	24 oz. Measuring Guide	10
DPC-40-K10	34 oz. Measuring Guide	10
Accessories		
DPC-22-K24	Disposable Funnel	24
Kits		
DPC-654	Demo Trial Kit Adapter for DeVilbiss/TEKNA/Finishline/Binks (1), 24 oz. Reusable Sleeve & Lid (1), 24 oz. Disposable Cups & Lids (8), Plugs (5), Disk Filter 125 Micron (4), Barrel Filter 300 Micron (1), Funnel (1), Measuring Guide (1), How-to-Use Guide	1
DPC-650	Shop Start Up Kit 24 oz. Reusable Sleeve & Lid (3), 9 oz. Reusable Sleeve & Lid (1), 24 oz. Disposable Cups & Lids (32), 9 oz. Disposable Cups & Lids (32), 24/34 oz. Disk Filter 125 Micron (12), 9 oz. Disk Filter 125 Micron (12), Barrel Filter 300 Micron (10), Barrel Filter 600 Micron (10), Funnel (24), 3 oz. Disposable Cups (3), Cleaning Brush, Cleaning Bottle, Magnets (5), How-to-Use Guide	1
Adapters		
DPC-43	DeVilbiss Full Size, Plus, GTI, RPi, JGA • Tekna • Binks M1G • Sharpe Cobalt, Platinum & Titanium (Use DPC-31 for FinishLine 2 & 3)	1
DPC-26	Accuspray Issac	1
DPC-31	DeVilbiss FinishLine 2 & 3	1
DPC-10	Sata NR2000, RP, KLC, MCB, QCC, 96719 & Jet 90 • Startingline Full Size	1
DPC-11	Sata NR 92 & 95 • Iwata LPH-400 & W400LV • Astro GF14, 17 & 20S • Sharpe Finex FX200 & FX300 • Transtar 6613,14,17	1
DPC-13	Sagola	1
DPC-23	DeVilbiss SRi, SRiW, SRiPro • Binks Cub	1
DPC-52-K1	Sata QCC & Threaded (Mini Detail)	1
DPC-64	DeVilbiss Starting Line (Mini Detail)	1
DPC-69-K1	DeVilbiss & Binks Suction Guns	1
DPC-78	Iwata Supernova, Air Gunsa & W300	1
DPC-500	3M Conversion Adapter - Converts 3M PPS adapter to use with DEKUPS system.	1
DPC-501	Sata QCC Full Size, 3000, 4000	1
DPC-504	SATA QCC Full Size	1
DPC-81	StartingLine Full Size • Sharpe Finex FX1000, 2000 & 3000	1
DPC-85	Accuspray Disposable Head	1
Air Dryer		
DAD-1	Desiccant Refill for DAD-507	1



Backing Pads



FJ - KLINGSPOR

SIZE	MOUNTING	THICKNESS	DENSITY	PART #	PART #
3"	5/16"-24	3/8"	Firm		FJ60693
5"	5/16"-24	3/8"	Medium	FJ70515V	FJ70515
5" x 5 Hole	5/16"-24	3/8"	Medium		FJ70515-H5
6"	5/16"-24	3/8"	Medium	FJ70516V	FJ70516
6" x 6 Hole	5/16"-24	3/8"	Medium		FJ70516-H6
6"	5/8"-11	3/8"	Medium	FJ60656V	FJ60656
8"	5/8"-11	3/8"	Medium	FJ60658V	FJ60618
8" x 5 Hole	5 Hole	3/8"	Medium	FJ81148	FJ81248
16 1/2" INLINE	2 Studs	3/8"	Firm	FJ160	FJ260
6" Interface		1/2"	Soft N/H		FJ06

PSA

Hook & Loop

Astro

SIZE	MOUNTING	THICKNESS	DENSITY	PART #	PART #
3"	5/16"-24		Firm	N/A	ASTRO20302

PSA

Hook & Loop

Dynabrade

SIZE	MOUNTING	THICKNESS	DENSITY	PART #	PART #
3" female	3/8"-24	5/8"			DYNA50126
3" female	3/8"-24	5/8"			DYNA50122
3"	5/16"-24	5/8"	Medium	DYNA56084	DYNA56087
5"	5/16"-24	3/8"	Medium	DYNA56106	DYNA54325
5" x 5 Hole	5/16"-24	3/8"	Medium	DYNA56104	DYNA54326
5"	5/16"-24	5/8"	Soft	DYNA56185	DYNA56195
5" x 5 Hole	5/16"-24	5/8"	Soft	DYNA56186	DYNA56196
6"	5/16"-24	3/8"	Medium	DYNA56107	DYNA54327
6" x 6 Hole	5/16"-24	3/8"	Medium	DYNA56105	DYNA54328
6"	5/16"-24	5/8"	Soft	DYNA56187	DYNA56197
6" x 6 Hole	5/16"-24	5/8"	Soft	DYNA56188	DYNA56198
8"	5 Hole	3/8"	Medium	DYNA56234	DYNA56236
8" INLINE	2 Hole	3/8"	Medium	DYNA57454	DYNA57456
11" INLINE	2 Hole	3/8"	Medium	DYNA57512	DYNA57513
3" Interface		3/8"	Soft 3" hole		DYNA53974
5" Interface		3/8"	Soft 5" hole		DYNA53978
6" Interface		3/8"	Soft 6" hole		DYNA53980

PSA

Hook & Loop



Long Nap Hook & Loop For Non-Woven

SIZE	MOUNTING	THICKNESS	DENSITY	PART #
5"	5/16"-24	1/2"	Medium	DYNA50605
6"	5/16"-24	1/2"	Medium	DYNA50606



Dynabrade manufactures some of the highest quality tools for the automotive aftermarket. They have spent years developing the best portable tools for many industrial trades and have now brought their knowledge to this special market segment. You'll get years and years of use from these top quality machines.

Dynorbital Extreme Sander

FEATURES

- Recessed throttle lever that eliminates pressure point on palm
- Integrated comfort platform that Provides enhanced ergonomic comfort
- Comfort grip with lip seal shroud allows excellent vacuum performance
- Weight-mated sanding pad
- Increased port size for better vacuum capture rate



NON-VACUUM * Non - Vacuum to Vacuum Conversion Kits available.

Pad Diameter	Pad Type	3/16 Orbit Models	3/32 Orbit Models
3"	Kling-On®	X31	X32
5"	PSA	X51	X52
5"	Kling-On®	X51H	X51H
6"	PSA	X61	X62
6"	Kling-On®	X61H	X62H

CENTRAL VACUUM

* Has 1" (25 mm) diameter port for easy connection to central vacuum system.

Pad Diameter	3/8 Orbit Models	3/16 Orbit Models	3/32 Orbit Models
3"	Kling-On®	X31V	X32V
5"	Kling-On®	X51V	X52V
6"	Kling-On®	X61V	X62V

FEATURES:

- Most consistent speed under load
- All new .3 HP motor design
- Best-in-class dust collection
- Tactile, ergonomic grip

NON-VACUUM * Non - Vacuum to Vacuum Conversion Kits available.

KLINGSPOR PRODUCTS:

- Kling-On® (Hook & Loop) Paper Discs
- 710 XF Kling-On® Cloth Discs

Pad Dia	Orbit Model	Item #	Pad Dia	Orbit Model	Item #
5"	3/16	DYNA00X51HK	5"	3/16	DYNA00X51VK
	3/32	DYNA00X52K		3/32	DYNA00X52VK
		DYNA00X52HK			
6"	3/16	DYNA00X61HK	6"	3/16	DYNA00X61VK
	3/32	DYNA00X62HK		3/32	DYNA00X62VK

RANDOM ORBITAL REFERENCE



5" Sander
#SOS5H

6" Sander
#SOS6H

SPARTAN

Orbital Sander

Dynabrade Authorized Air Power Tools

NitroZip RED-TRED® DYNA00NZ1

- Dynabrade Nitro Series™ NitroZip RED-TRED® wheel outperforms conventional spiral-wound wheels without clogging
- Excellent power for effectively removing seam sealer, paint, two-sided adhesive molding tape and decal material
- Tool using wire wheel duplicates sand-blasting effect without surface fatigue
- Eraser wheel has serrations for improved cooling effect air flow.
- Also resists heat buildup and reduces jumping and vibration



Nitro Extension Buffer/Polisher DYNA00EB3

- Tool includes 50126 hook-face backup pad
- Tactile, thermoplastic grip
- 3/8"-24 male spindle, rear exhaust
- Rotational rear exhaust directs cold air away from operator

4" Diameter Extension Right Angle Cut-Off Wheel DYNAECU4

- Model accepts 4" (76 mm) diameter Type 01/41 reinforced
- Cut-Off Wheels, with 3/8" (9.5 mm) center hole
- Composite grip absorbs vibration and reduces cold air transmission to operator
- Quick change lever controls, multi-position guard
- Adjustable exhaust



Dynabug II DYNA58503

- Powerful .15 hp (112 W), 10,000 RPM air motor. Utilizes just 13 SCFM (368 L/Min) at 90 PSIG (6.2 Bar).
- Precise 3/32" orbital motion is ideal for achieving a controlled, ultra-fine finish on a variety of surfaces.
- Compact size is ideal for all operators, including those with smaller hands.
- Engineered and tested to ensure less tool vibration than any competitive model!
- Lighter tool weight minimizes hand and arm fatigue. Perfect for vertical applications.
- Rectangular shape sands deep into corners, where round pads cannot reach.
- Includes 56315 Hook-Face Sanding Pad, 74 mm wide x 109 mm long (approximately 3" x 4-1/4")

Dynaline Sander DYNA57400

- 2,400 strokes per minute at 90 PSIG (6.2 Bar).
- Uses adhesive-backed coated and non-woven nylon sheets and rolls.
- Quality constructed pad is weight-mated to tool for low vibration, smooth operation and superior finishes.
- Includes 2-3/4" wide x 8" long vinyl-face non-vacuum Sanding Pad (57454).



Orbital Sander DYNA58445

- Unique epicycloidal sanding action allows aggressive removal of material.
- Applications include removal and leveling of large amounts of filler materials such as glue or epoxy; removing coatings. For use on materials including solid surfaces, wood and fiberglass.
- Ergonomically designed for low vibration and reduced sound levels.
- Excellent comfort and control, especially when working on vertical sides or large tabletops. Long handle allows for two-hand support of tool.
- Includes 56234 Vinyl-Face Sanding pad.

NITROZIP KITS AND ACCESSORIES

- DYNA92252 1/2" Wheel Hub Assembly (1)
- DYNA92248 1/2" Coarse Wire Wheel (1)
- DYNA92239 3/4" Wheel Hub Assembly (1)
- DYNA92245 3/4" Coarse Wire Wheel (1)
- DYNA92255 RED-TRED® Zip Eraser Wheel (1)



Dynabrade Authorized Accessories

PRODUCT	FEATURES
 <p>COMPOSITE DYNASWIVEL® DYNA94300</p>	<ul style="list-style-type: none"> • Swivels 360° at two pivot points • Improves tool maneuverability • Extends hose life • 1/4" NPT thread size • Non-marring composite construction
 <p>FLOW CONTROL DYNASWIVEL® DYNA95734 ALUMINUM HOUSING.</p> <p>COMPOSITE DYNASWIVEL® DYNA94407</p>	<ul style="list-style-type: none"> • Finger tip air-flow control dial • 1/4" NPT • Heavy-duty construction • Swivels 360° at two pivot points
 <p>1/2" NPT FILTER/REGULATOR/LUBRICATOR DYNA10681</p>	<ul style="list-style-type: none"> • Cost-Effective Solutions for Air Systems • Unit has modular connections with mounting brackets for easy installation
 <p>SAFETY TYPE MODEL DYNAJET IN-LINE BLOW GUN DYNA94467</p>	<ul style="list-style-type: none"> • Reduces line pressure down to 30 psi • Keep work pieces and workstations clean • Durable, aluminum construction • Mounts permanently between coupler & air hose • 1/4" NPT female threads at both ends • Weighs only 2 oz. • Purge lines of water and contaminants
 <p>DYNABRADE GREASE AND GREASE GUN DYNA95541</p>	<ul style="list-style-type: none"> • Multi-purpose grease for all types of bearing, cams, gears • High film strength; excellent resistance to water, steam, etc. • Workable range 0° to 300°
 <p>GEAR OIL DYNA95848</p>	<ul style="list-style-type: none"> • 2-1/2 ounce
 <p>DYNABRADE AIR LUBE AVAILABLE IN SIZES 4 ounces DYNA95821 1 pint DYNA95842 and 1 gallon DYNA95843</p>	<ul style="list-style-type: none"> • Highly recommended in use of all Dynabrade tools • Absorbs up to 10% of its weight in water • Prevents rust and formation of gum and sludge • Keeps pneumatic tools operating longer with greater power and less downtime
 <p>DYNABRADE MUFFLER INSERT DYNA56027 30 PACK DYNA56054</p>	<ul style="list-style-type: none"> • Highly recommended to keep contaminants out of tool motor • For use in many Dynabrade pneumatic tools
 <p>DYNABRADE MUFFLER CAP DYNA56028</p> <p>DYNABRADE THREADED MUFFLER CAP DYNA69359</p>	<ul style="list-style-type: none"> • Standard rear muffler cap for all Dynabrade orbital sanders and many other Dynabrade pneumatic tools
 <p>DYNABRADE 26mm WRENCH DYNA50679</p>	<ul style="list-style-type: none"> • Standard 26mm flat wrench to change pads on all palm style orbital sanders
 <p>QUICK CHANGE COUPLER NPT FEMALE END DYNA95674</p>	<ul style="list-style-type: none"> • Durable nickel-plated steel and brass construction • Single action quick connect by just inserting plug into coupler. • Pull back on sleeve of coupler for quick disconnect
 <p>1/4" "PORTED" MALE TO MALE PLUG NPT MALE END DYNA95675</p>	<ul style="list-style-type: none"> • Ported design to prevent starving of the air tool • Provides up to twice the airflow compared to standard plug design • Durable zinc-plated steel construction

Astro Power Tools

PNEUMATIC DUAL PISTON FILE BOARD SANDER ASTRO888C

Features a dual piston design, which provides for stall-free performance. Performs on plastic fillers at any stage of hardening. Feathers with ease of smoothness. The dual piston design that provides efficient power and prevents stalling. Two handle design for comfortable operation. Strokes 2,400 per minute. 1" Stroke. Air pressure: 90-120psi. Weight only 6.5 lbs. Accepts 2 3/4" x 16" board file sheets.



3" SANDING KIT ASTRO3050

is blow molded case for easy storage and transport. The Kit Includes Pistol Grip Dual Action Sander/Polisher Tool - 15,000rpm, Blow molded

case for easy storage and transport, 1 - 3" Sanding/Polishing Back-up Pad, 1 - 1-1/2" Velcro Holder, 1 - 1-1/2" Sanding Pad, 1 - 3" Polishing Foam Pad, 2 - 3" 400 Grit Sanding Disc, 2 - 3" 600 Grit Sanding Disc, 2 - 3" 1000 Grit Sanding Disc, 10 - 1-1/2" 2000 Grit Sanding Disc, 1 - Spanner Wrench

ASTRO AIR BELT SANDER (1/2" X 18") ASTRO3037

is a great tool for Spot Weld Removal or working a door/ trunk jam. The sander has a non-slip handle grip with a built in variable speed control. Increased pulley space for thicker belts such as non-woven belts, also has a simple belt tension lever for easy belt changes. Included in the box are 3 belts, one of each 36, 40, & 60 grits in our premium 411 material.

Specs: Air Pressure: 90 psi, Air Consumption: 4 CFM's, Power: 0.75 HP, Free Speed: 16,000 rpm's, Inlet: 1/4" NPT, Weight: 1.98 lbs., Overall Length: 15.15".



ONYX IN-LINE 3" CUT-OFF TOOL ASTRO209

Unique In-Line Design Provides Greater Control, Positive control and lock-out throttle protection, Adjustable protection guard, Chrome plated steel spark guard, Variable speed control. Specifications: Wheel Size: 3", Free Speed: 15,000rpm. Overall Length: 8-1/4" (210mm), Net Weight: 2lbs. (0.93kg), Air Inlet Thread NPT: 1/4". Air Hose I.D. Size: 3/8" (10mm), Average Air Consumption: 4cfm Air Pressure: 90-120psi



ASTRO QUICK CHANGE IN-LINE 4" CUT OFF TOOL ASTRO409

is a 4" In-Line Cut Off Tool that features a quick change button on the housing that locks the motor on the housing that allows for straighter and naturally consistent cuts. Lever lock safety guard quickly and easily adjusts. Uses 4" discs with either 3/8" or 5/8" arbor hole.

Specs: Air Pressure: 90 psi
Air Consumption: 4.5 CFM's
Noise level: 85dB
Power: 0.75 HP
Free Speed: 14,000 rpm's
Inlet: 1/4" NPT
Weight: 2.3 lbs.
Overall Length: 9.25".



ASTRO ONYX 201 1/4" STRAIGHT DIE GRINDER

The Astro Pneumatic 409 has a composite handle that reduces vibration, also includes:

- Rib textured handle provides a firm grip
- Lever throttle for feathering control
- Rear exhaust
- Built-in regulator
- Safety lever

Specs: Collet Size: 1/4"
Free Speed: 25,000rpm
Overall Length: 7" (177mm)
Net Weight: 13/16lbs (.37kgs)
Motor: 1/3hp
Air Inlet Thread NPT: 1/4"
Air Hose I.D. Size: 3/8" (10mm)
Avg. Air Consumption: 3cfm
Air Pressure: 90-120psi



Power Tools

HEAVY DUTY AIR SABER SAW ASTRO930

Ideal for body shop repair, muffler and exhaust work, and the adjustable blade guide increases blade life. Cuts all types of aluminum, plastic, fiberglass and sheet metal. Very versatile; cuts intricate shapes and tight radius curves on flat and curved surfaces. 10,000 strokes per minute!



5PC. BLADE SET FOR ASTRO930

Includes 5 bi-metal multi-purpose saw blades per pack. Blade replacement is quick and easy, and cuts through pipe, mild steel, aluminum, plastic and fiber glass.

- ASTRO5SAW - 24 teeth
- ASTRO5SAWR - 32 teeth



5" HIGH SPEED SANDER ASTRO222S

18,000 RPM, vibration free performance. Comes complete with 3" and 4 1/2" phenolic backing pads and hub wrench. Lightweight pistol grip design offers greater control and comfort. Ideal for touch up sanding with a built-in regulator for positive speed control. Direct drive motor with handle exhaust.



ASTRO DUAL TEMPERATURE HEAT GUN KIT ASTRO9425

is the ideal tool for Stripping Paint, Removing Decals and Pinstripes, Shrinking Wire Wrap, etc. It is Lightweight, Low noise and vibration for easy use and is Double Insulated for extra safety. Meets IEC standards and has GS, CE, EMS, CSA and UL certifications. Two heat setting: Low @ 572°F, High @ 932°F. Kit includes Heat Gun with blow molded case, 2 Deflector nozzles (1 Large, 1 small), 1 Reduction nozzle, 1 Reflector nozzle



3/8" REVERSIBLE AIR DRILL ASTRO525C

Lightweight, compact size is easy to handle that provides full power in forward and reverse. Equipped with a built-in muffler for noise reduction, and planetary gear system for long life.



HOT STAPLE GUN KIT FOR PLASTIC REPAIR ASTRO7600

- Hot Staple Gun designed for quick repair and reinforcing broken/ripped/damaged/split plastic on autos, motorcycles, ATVs, boats, etc.
- Produces a strong durable repair while still leaving plastic flexible enough for correct fit
- Unique Staple Gun heats special designed staples and sets staples into plastic
- Repairs plastic components such as bumpers, headlight fittings and assemblies, panel clips, tabs, plastic pins, spoilers, etc.
- Easy to use, saves time and money
- Kit includes: Hot Staple Gun, Wire Cutter, Flip Screwdriver, 50pc each of "M", "S", "V" and "Z" Style Staples
- CSA Approved and Patent Pending

Also Sold Separately: 50/pack

7600M – 50pc "M" Style Staple for repairing outside corners

7600S – 50pc "S" Style Staples for repairing flat plastic areas

7600V – 50pc "V" Style Staples for repairing inside plastic corners

7600Z – 50pc "Z" Style Staples for repairing flat plastic areas that need extra reinforcement



ENVIRONMENTAL PROTECTION AND REGULATORY COMPLIANCE MESSAGE:

KLINGSPOR truly believes in environmental responsibility. Environmental Responsibility not only includes the development of low V.O.C. products, and waterbased technology, it also governs the use of KLINGSPOR products.

We want you to continue to use the KLINGSPOR product line and to feel confident that you are getting a quality product along with the support you may need to use our products safely and with optimum results.

Regulatory controls are necessary to protect our customers, our environment and our community. Our employees are dedicated to maintaining high safety standards for our products. We urge you to do the same.

Wear safety equipment, dispose of hazardous waste in accordance with your local, state and federal guidelines. Most of all, use the products designed for your area. The chart below will outline regulatory codes for compliant usage in specific areas. If you have any questions, you can call our toll free number and speak to anyone about the safe use of KLINGSPOR products. Safety today for a better tomorrow!

Note: If there is no regulatory code designation, that indicates that a product is compliant in all markets.

The information contained in these price pages is believed to be accurate at the time of printing. However, regulations governing V. O. C. levels are subject to change from time to time. Please consult with your local regulatory office for the most current regulations. The V. O. C. of certain products are subject to change due to the formulation of the product(s) or in mixing or reduction level recommendations. If you have questions, please contact your local KLINGSPOR representative.



2555 Tate Boulevard, SE,
PO Box 1428
Hickory, North Carolina 28603-1428
Toll Free 877-456-5566
Corporate 828-322-3030
Toll Free Fax 877-257-1756

www.KlingsporAutobody.com
PUB230901ABG

GROUP 1

CA	Antelope Valley (AQMD)
	Bay Area (AQMD)
	Eastern Kern
	Imperial County (AQMD)
	Mojave Desert (AQMD)
	Placer County (APCD)
	Sacramento Metro (APCD)
	San Diego County (AQMD)
	San Joaquin Valley (APCD)
	San Luis Obispo (ACMD)
	Santa Barbara
	South Coast (AQMD)
	Ventura County (AQMD)
	Yolo-Solano (APCD)
CN	Canada
DE	Delaware

GROUP 2

CA	Butte County
	Colusa County
	Feather River
	Glenn County
	Shasta County
	Tehama County

GROUP 3

CA	El Dorado (APCD)
----	------------------

GROUP 4

CT	Connecticut
DC	District of Columbia
MD	Maryland
ME	Maine
NJ	New Jersey
NY	New York
PA	Pennsylvania
RI	Rhode Island

GROUP 5

CA	California (CARB)
----	-------------------



KLINGSPOR

The Most Sanding Power for Your Money Since 1893!®

**SANDPAPER
GRINDING DISCS
SAFETY PRODUCTS**



**POWER TOOLS
MASKING PRODUCTS
PRIMERS, SEALERS,
& CLEARCOATS**